

Technical data sheet

CombiController V80 280 V

Item no. 5093800



Combination arrester, lightning current and surge arrester, type 1+2


- For lightning current equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity of 12.5 kA (10/350) per pole and up to 50 kA (10/350) in total
- Impulse current arresting capacity up to 80 kA (8/20)
- Modular, plug-in arrester with cut-off unit and visual status display
- Locking mechanism with vibration protection and voltage keying
- Plastic to UL 94 V-0
- The remote signalling (FS) variants have a potential-free changeover contact for remote signalling

Application: Lightning current equipotential bonding for buildings of class III and IV.

* Complete = cover and base



Dimensions

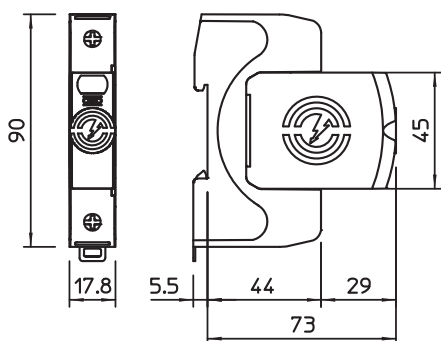

Master data

| | |
|--------------------------|---------------------|
| Item no. | 5093800 |
| Type | V80-1-280 |
| Description 1 | CombiController V80 |
| Description 2 | 1-pole |
| Dimension | 280V |
| Smallest sales unit (VG) | 1 Piece |
| Weight | 16,40 kg/100 pc. |

Technical data sheet

CombiController V80 280 V

Item no. 5093800

Technical data



| | |
|--|-----------------------|
| SPD to EN 61643-11 | Type 1+2 |
| SPD to IEC 61643-11 | Class I+II |
| SPD to UL 1449 | Type 4 |
| Nominal voltage AC (50/60 Hz) | 230,00 V |
| Nominal voltage DC | 350,00 V |
| Maximum continuous voltage AC | 280,00 V |
| Maximum continuous voltage (L-N) | 280,00 V |
| Maximum continuous voltage (N-PE) | 255,00 V |
| Nominal frequency | 50,00 Hz |
| Nominal discharge current (8/20 µs) | 40,00 kA |
| Nominal discharge current (8/20 µs) [L-N] | 40,00 kA |
| Maximum discharge current (8/20 µs) | 80,00 kA |
| Maximum discharge current (8/20 µs) [L-N] | 80,00 kA |
| Lightning surge current (10/350 µs) | 12,50 kA |
| Lightning surge current (10/350 µs) [L-N/PE] | 12,50 kA |
| Protection level | 1,40 kV |
| Protection level [L-N] | 1,40 kV |
| Protection level [N-PE] | 1,50 kV |
| Residual voltage [L-N] @ 1 kA | 0,7 kV |
| Residual voltage [L-N] @ 5 kA | 0,8 kV |
| Residual voltage [L-N] @ 7 kA | 0,9 kV |
| Residual voltage [L-N] @ 12.5 kA | 1,0 kV |
| Response time | <25 ns |
| Response time [L-N] | 25 ns |
| Max. mains-side overcurrent protection | 160 A gL/gG |
| Short-circuit withstand for max. mains-side overcurrent protection | 50 kA eff |
| TOV voltage [L-N] – fail safe mode – 120 min. | 440,00 V |
| TOV voltage [L-N] – withstand mode – 5 s | 335,00 V |
| Operating temperature range | -40+80 °C |
| Humidity | 5,00 - 95,00 % |
| Function/defect display | Optical |
| Ports | One-Port SPD |
| Pole version | 1 |
| Pole number | 1 |
| Connection cross-section (min.) | 1,50 mm ² |
| Connection cross-section (max.) | 35,00 mm ² |
| Connection cross-section (min.) | 16,00 AWG |
| Connection cross-section (max.) | 2,00 AWG |
| Torque | 4,00 Nm |
| Torque | 35,00 Lbs |
| Mounting type | Hat rail 35 mm |
| Housing material | PA UL 94 V-0 |
| Installation location | Interior |
| Protection rating | IP20 |
| Installation dimensions (LxWxH) | 90x17,8x78,5 mm |
| Minimum distance | 1,50 mm |

Technical data sheet

CombiController V80 280 V

Item no. 5093800



Technical data

| | |
|---|------------------------------|
| Approvals | |
| Connection cross-section, FM terminals | 0,5-1,5 mm ² |
| Connection cross-section, FM terminals | 21-16 AWG |
| Torque for FM terminal | 0,20 Nm |
| Torque for FM terminal | 1,70 Lbs |
| Protective conductor current | < 600 µA |
| Blow-out | <input type="checkbox"/> |
| Size | 1 part unit |
| Remote signalling | <input type="checkbox"/> |
| Integrated back-up fuse | <input type="checkbox"/> |
| Max. cable cross-section flexible (fine-wire) | 35,00 mm ² |
| Max. cable cross-section rigid (single wire/multi-wire) | 35,00 mm ² |
| Conductor cross-section, flexible (fine-wire) | 1,50 - 35,00 mm ² |
| Conductor cross-section, flexible (fine-wire) | 16,00 - 2,00 AWG |
| Conductor cross-section, rigid (single wire/multi-wire) | 16,00 - 2,00 AWG |
| Conductor cross-section, rigid (single wire/multi-wire) | 1,50 - 35,00 mm ² |
| Signalling on device | Visual |