

# Technical data sheet

## Twin cable gland, metric thread, light grey

Item number: 2024063



IP54 protection rating, with removable polystyrene lid, as well as two connection thread sealing rings made of polyethylene.

With connection thread M20 x 1.5, 2 half glands PG 13.5 for cable diameter 6.5–10.5 mm.

113/M20: with connection thread M20 x 1.5, 2 half glands Pg 13.5 for cable diameter 6.5–10.5 mm.



Duroplast, Aminoplast

### Master data

|                                   |                                |
|-----------------------------------|--------------------------------|
| Item number                       | 2024063                        |
| Description 1                     | Twin cable threaded connection |
| Manufacturer                      | OBO                            |
| Dimension                         | M20                            |
| Colour                            | Light grey; RAL 7035           |
| Material                          | Duroplast, Aminoplast          |
| Smallest sales unit               | 5                              |
| Unit of quantity                  | Piece                          |
| Weight                            | 3.701 kg                       |
| Weight unit                       | kg/100 pc.                     |
| CO Footprint (GWP) Cradle-to-Gate | 0,1609 kg COe / 1 Piece        |


# Technical data sheet

Twin cable gland, metric thread, light grey

Item number: 2024063



## Dimensions

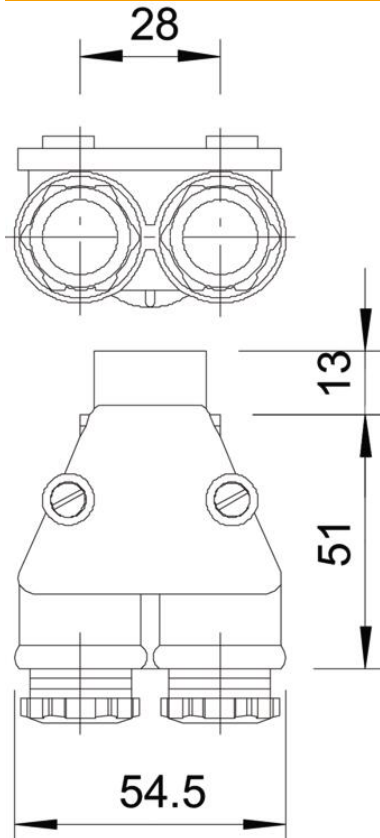

## Technical data

|                          |                                                           |
|--------------------------|-----------------------------------------------------------|
| Version for              | Straight                                                  |
| Bend protection          | no                                                        |
| Sealing area D, max.     | 10.5 mm                                                   |
| Sealing area D, min.     | 6.5 mm                                                    |
| explosion-proof          | no                                                        |
| Flat cable gland         | no                                                        |
| Flame-resistant          | acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C |
| For Ex zone              | Without                                                   |
| Thread                   | M 20 x 1,5                                                |
| Thread type              | Metric                                                    |
| Fibre-glass reinforced   | no                                                        |
| Halogen-free             | yes                                                       |
| Sealing insert, multiple | no                                                        |
| With locknut             | no                                                        |
| Impact-resistant         | no                                                        |
| Protection rating        | IP54                                                      |
| Splittable gland         | no                                                        |
| Strain relief option     | no                                                        |