


# Technical data sheet

## Clamp clip, single, FT metal pressure trough

Item number: 1158066



Suitable for all C profile rails with slot width 18 mm and 22 mm.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                   |                          |
|-----------------------------------|--------------------------|
| Item number                       | 1158066                  |
| Description 1                     | Clamp clip               |
| Description 2                     | with metal pressure sump |
| Manufacturer                      | OBO                      |
| Dimension                         | 34-40mm                  |
| Material                          | Steel                    |
| Surface                           | Hot-dip galvanised       |
| Surface standard                  | DIN EN ISO 1461          |
| Smallest sales unit               | 100                      |
| Unit of quantity                  | Piece                    |
| Weight                            | 8.36 kg                  |
| Weight unit                       | kg/100 pc.               |
| CO Footprint (GWP) Cradle-to-Gate | 0,1591 kg COe / 1 Piece  |


# Technical data sheet

## Clamp clip, single, FT metal pressure trough

Item number: 1158066



### Dimensions

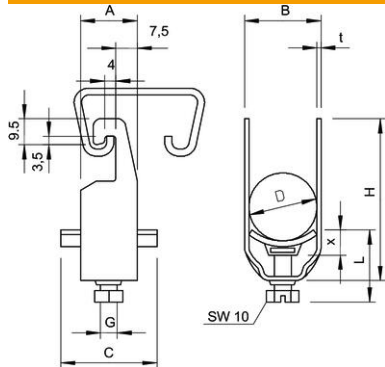

|                  |         |
|------------------|---------|
| Dimension A      | 20 mm   |
| Dimension B      | 45 mm   |
| Dimension C      | 34 mm   |
| Dimension G (mm) | M8      |
| Dimension H      | 73 mm   |
| Dimension L      | 37.5 mm |
| Dimension t      | 2 mm    |
| Dimension x      | 5.5 mm  |

### Technical data

|                                                |                |
|------------------------------------------------|----------------|
| Number of cables/pipes                         | 1              |
| For pipe diameter, max.                        | 40 mm          |
| For pipe diameter, min.                        | 40 mm          |
| for rail with slot width (with interval), max. | 22 mm          |
| for rail with slot width (with interval), min. | 18 mm          |
| Halogen-free                                   | no             |
| Max. Tightening torque                         | 5 Nm           |
| With plastic trough                            | no             |
| With metal trough                              | yes            |
| Mounting type                                  | Profile rail   |
| Impact-resistant                               | no             |
| Clamping range D, max.                         | 40 mm          |
| Clamping range D, min.                         | 34 mm          |
| Surface addition                               | hot galvanised |
| Material addition                              | Steel          |
| With counter-trough                            | no             |
| Material of trough                             | Steel          |