

# Technical data sheet

## Cable and pipe spacer clip 732 with threaded connection

Item number: 1360167



Mounting with screw-in spacer clips. Spacer clips and screw-in spacer clips are available in various materials: in V2A stainless steel, in electrogalvanised, hot-dip galvanised steel or in aluminium. Fastening can take place with bolt ties or angler anchors and Sprint screws.

Depending on the design, the clips can be "shot" using a bolt-firing tool or nail device.



**St** Steel

**GTP** Electrogalvanized, transparently passivated

### Master data

|                     |   |
|---------------------|---|
| Item number         | 1360167                                     |
| Type                | 732 16 GTP                                  |
| Description 1       | Distance saddle                             |
| Description 2       | with threaded connection M6                 |
| Manufacturer        | OBO   |
| Dimension           | 14,5-16mm                                   |
| Material            | Steel                                       |
| Surface             | Electrogalvanized, transparently passivated |
| Surface standard    |   |
| Smallest sales unit | 100   |
| Unit of quantity    | Piece                                       |
| Weight              | 1.59 kg                                     |
| Weight unit         | kg/100 pc.                                  |


# Technical data sheet

## Cable and pipe spacer clip 732 with threaded connection



Item number: 1360167

### Dimensions

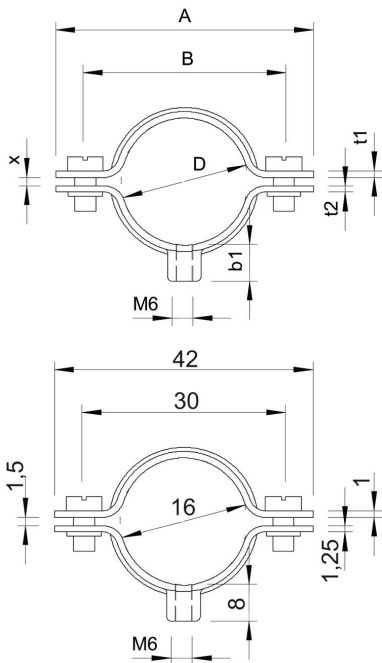

|                   |        |
|-------------------|--------|
| Length            | 42 mm  |
| Dimension A       | 42 mm  |
| Dimension B       | 30 mm  |
| Dimension b1      | 8 mm   |
| Dimension t1 (mm) | 1      |
| Dimension t2 (mm) | 1.25   |
| Dimension x       | 1.5 mm |

### Technical data

|                                  |                     |
|----------------------------------|---------------------|
| Distance to the wall             | yes                 |
| Number of cables/pipes           | 1                   |
| Version for                      | Closed              |
| Fastening type                   | Threaded connection |
| Suitable in fire protection area | yes                 |
| Size                             | M16                 |
| Halogen-free                     | yes                 |
| Plastic-covered                  | no                  |
| Hole size                        | M6 mm               |
| Material thickness               | 1 mm                |
| Bolt                             | M5 x 12             |
| Clamping range D, max.           | 16 mm               |
| Clamping range D, min.           | 14.5 mm             |
| UV-resistant                     | yes                 |