

Technical data sheet

Drop-in anchor E A4

Item number: 3492932



Drop-in anchor for single fixings of non-load-bearing systems in non-cracked concrete as well as for multiple fixings in cracked and non-cracked concrete.

Tested to fire protection standards, fire resistance class R 120 according to European Technical Approval ETA-02/0020 (option 7) and European Technical Approval ETA-05/0116.

Mounting with marking and setting tool.



A4 Stainless steel

2B Bright, treated

Master data

| | |
|---------------------|------------------|
| Item number | 3492932 |
| Description 1 | Drop-in anchor E |
| Manufacturer | OBO |
| Dimension | M12x50 |
| Material | Stainless steel |
| Surface | Bright, treated |
| Surface standard | |
| Smallest sales unit | 50 |
| Unit of quantity | Piece |
| Weight | 4.38 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Drop-in anchor E A4

Item number: 3492932



Dimensions

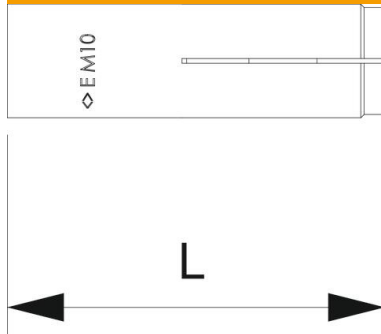

| | |
|-------------|-------|
| Length | 50 mm |
| Dimension L | 50 mm |

Technical data

| | |
|------------------------------------|------------------|
| Version for | Lightning strike |
| Fastening unit | Miscellaneous |
| Drill hole depth | 50 mm |
| Drill hole diameter, min. | 15 mm |
| Screw-in depth, max. | 18 mm |
| Screw-in depth, min. | 13 mm |
| Thread | M12 |
| Thread metric | 12 |
| Self-drilling | no |
| Approvals available | yes |
| Permitted load range, tension zone | 2.4 |