

Technical data sheet

Nail anchor N-K with nail head

Item no. 3498390



The nail anchor N-K can be used for multiple fastenings of non-load-bearing systems and in cracked and non-cracked concrete, thereby combining the benefits of a bolt tie with even easier mounting. The nail anchor only needs to be hammered into the drill hole. When the load occurs, the nail anchor spreads itself and bolts itself in the drill hole.

European Technical Approval ETA-11/0240, including characteristic values under fire exposure to fire resistance R 120.




St	Steel
G	Electrogalvanised

Master data

Item no.	3498390
Type	N-K 6-5-10/44
Description 1	Nail anchor N-K
Description 2	with nailhead
Dimension	6x44mm
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	100 Piece
Weight	1,14 kg/100 pc.

Technical data

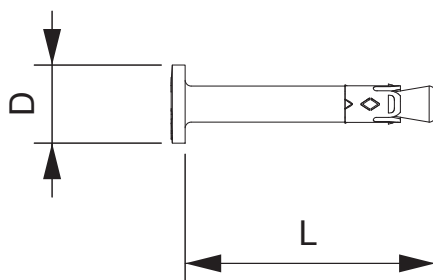

Length	44,00 mm
Dimension D	13,00 mm
Dimension L	44,00 mm
Version	Lightning strike
Fastening unit	Other
Drill hole depth	40,00 mm
Drill hole diameter	6,00 mm
Clamping range	5-10 mm
Clamping strength	5,00 mm
Self-drilling	<input type="checkbox"/>
Approvals available	<input checked="" type="checkbox"/>