Technical data sheet

XLR connection, 1 module, straight outlet, 3-pin connector, as soldered connection, black-grey Item number: 6105225





Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, 3-pin XLR connector with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Master data

Item number	6105225
Туре	MTG-X3M L SWGR1
Description 1	Multimedia support, XLR, 3-pin
Description 2	connector w. sold. connection
Manufacturer	OBO
Dimension	45x45mm
Colour	Black-grey; RAL 7021
Material	Polycarbonate
Smallest sales unit	1
Unit of quantity	Piece
Weight	3 kg
Weight unit	kg/100 pc.

Technical data sheet

XLR connection, 1 module, straight outlet, 3-pin connector, as soldered connection, black-grey Item number: 6105225



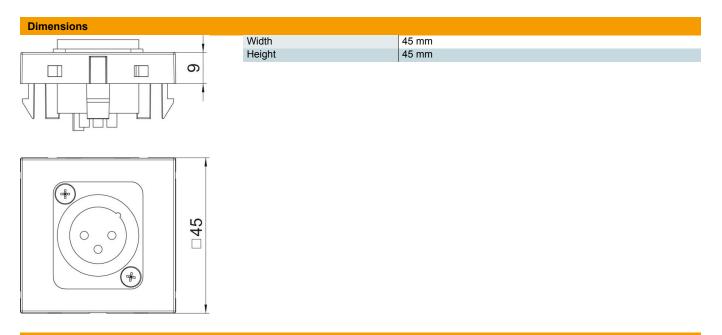

Technical data

Surface versionMattFastening typeLockLabelling panelWith labelling panelHalogen-freeyesHinged covernoLamp-wire connectornoWith printed labelnoWith dust protectionnoProtection ratingIP20Depth9 mmSupport ringnoTransparentnoUseXLRStrain relief optionnoSame and the specific optionnoStrain relief optionBasic element with central cover plate		
Labelling panelWith labelling panelHalogen-freeyesHinged covernoLamp-wire connectornoWith printed labelnoWith dust protectionnoProtection ratingIP20Depth9 mmSupport ringnoTransparentnoUseXLRStrain relief optionno	Surface version	Matt
Halogen-freeyesHinged covernoLamp-wire connectornoWith printed labelnoWith dust protectionnoProtection ratingIP20Depth9 mmSupport ringnoTransparentnoUseXLRStrain relief optionno	Fastening type	Lock
Hinged covernoLamp-wire connectornoWith printed labelnoWith dust protectionnoProtection ratingIP20Depth9 mmSupport ringnoTransparentnoUseXLRStrain relief optionno	Labelling panel	With labelling panel
Lamp-wire connectornoWith printed labelnoWith dust protectionnoProtection ratingIP20Depth9 mmSupport ringnoTransparentnoUseXLRStrain relief optionno	Halogen-free	yes
With printed labelnoWith dust protectionnoProtection ratingIP20Depth9 mmSupport ringnoTransparentnoUseXLRStrain relief optionno	Hinged cover	no
With dust protectionnoProtection ratingIP20Depth9 mmSupport ringnoTransparentnoUseXLRStrain relief optionno	Lamp-wire connector	no
Protection ratingIP20Depth9 mmSupport ringnoTransparentnoUseXLRStrain relief optionno	With printed label	no
Depth9 mmSupport ringnoTransparentnoUseXLRStrain relief optionno	With dust protection	no
Support ring no Transparent no Use XLR Strain relief option no	Protection rating	IP20
Transparent no Use XLR Strain relief option no	Depth	9 mm
Use XLR Strain relief option no	Support ring	no
Strain relief option no	Transparent	no
•	Use	XLR
Combination Basic element with central cover plate	Strain relief option	no
	Combination	Basic element with central cover plate
Outlet direction Straight	Outlet direction	Straight