


# Technical data sheet

## Magic bend, variable 60 FT

Item number: 6040506



Magic bend 0°–90°, variable, with quick connector system. For all cable tray types of 60 mm side height.

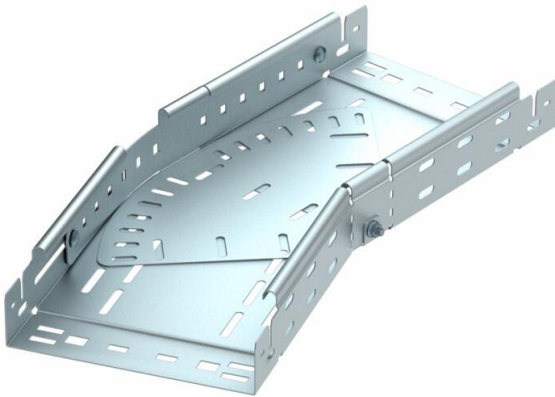

St

Steel

FT

Hot-dip galvanised

### Master data

|                     |                      |
|---------------------|----------------------|
| Item number         | 6040506              |
| Description 1       | Variable bend        |
| Description 2       | with quick connector |
| Manufacturer        | OBO                  |
| Dimension           | 60x300               |
| Material            | Steel                |
| Surface             | Hot-dip galvanised   |
| Surface standard    | DIN EN ISO 1461      |
| Smallest sales unit | 1                    |
| Unit of quantity    | Piece                |
| Weight              | 386.3 kg             |
| Weight unit         | kg/100 pc.           |

# Technical data sheet

Magic bend, variable 60 FT

Item number: 6040506



## Dimensions

|                 |         |
|-----------------|---------|
| Width           | 300 mm  |
| Width           | 12 in   |
| Height          | 60 mm   |
| Height          | 2 in    |
| Plate thickness | 1.25 mm |
| Dimension B     | 300 mm  |
| Dimension L     | 2.1 ft  |
| Dimension L     | 640 mm  |

## Technical data

|                                         |                      |
|-----------------------------------------|----------------------|
| Bend (angle)                            | Adjustable           |
| Connector version                       | Integrated connector |
| Maintain electrical functions           | yes                  |
| Mounting perforation in base            | yes                  |
| NATO hole pattern                       | no                   |
| Change of direction                     | Horizontal           |
| Rustproof steel, pickled                | no                   |
| Side perforation                        | yes                  |
| Wide-span version                       | no                   |
| Type of connector, cable support system | Click fastening      |