

# Technical data sheet

## Beam clamp SSP 20-40, FT M8

Item number: 1486288



This type of support clamp is pushed onto the support and fixed to the girder or flat iron using a pressure trough and bolt (M8). The hexagonal bolt has a WAF of 10 mm. In the clip element also two more M8 threads are introduced, for example to attach threaded rods.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                   |                         |
|-----------------------------------|-------------------------|
| Item number                       | 1486288                 |
| Type                              | SSP 20-40 M8 FT         |
| Description 1                     | Beam clamp              |
| Description 2                     | heavyweight design      |
| Manufacturer                      | OBO                     |
| Dimension                         | 20-40mm                 |
| Material                          | Steel                   |
| Surface                           | Hot-dip galvanised      |
| Surface standard                  | DIN EN ISO 1461         |
| Smallest sales unit               | 25                      |
| Unit of quantity                  | Piece                   |
| Weight                            | 27.8 kg                 |
| Weight unit                       | kg/100 pc.              |
| CO Footprint (GWP) Cradle-to-Gate | 0,5584 kg COe / 1 Piece |


# Technical data sheet

## Beam clamp SSP 20-40, FT M8

Item number: 1486288



### Dimensions

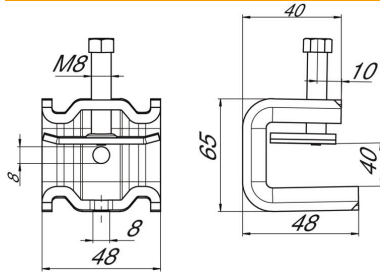

|             |       |
|-------------|-------|
| Dimension B | 48 mm |
| Dimension H | 65 mm |
| Dimension L | 47 mm |

### Technical data

|                                  |        |
|----------------------------------|--------|
| Connection type/component        | Thread |
| Fastening type                   | Clamp  |
| Breaking load F1                 | 1.4 kN |
| Breaking load F2                 | 1.3 kN |
| Flange thickness F max.          | 40 mm  |
| Flange thickness F min.          | 20 mm  |
| Suitable for metric threaded rod | 8      |
| Thread                           | M8     |
| Thread metric                    | 8      |
| Hinge, adjustable                | no     |
| Hinged                           | no     |