#### **Technical data sheet**

#### Aquasit cold casting compound with T40 junction box







Junction box set with terminal strip for the connection of cables and lines indoors and in outdoor areas exposed to high levels of and long-lasting dampness. Including Aquasit two-component casting compound in a cartridge. Square design with plug-in seals to the sides and knock-out entries in the bottom. Suitable for wall and ceiling mounting and on mounting panels. With the option to fasten inside. With fixed clamping cover. Made from halogen-free materials.

Junction box according to EN 60670. Flame-resistant to EN 60695/2/11, test temperature 650 °C. Impact resistance IK07 according to EN 50102.

Aquasit: Protection rating IP68, rated voltage 400 V, penetration resistance >25 kV/mm to VDE 0291 Part 2, operating temperature: -40 to +80  $^{\circ}$ C, processing temperature 5 to +40 °C, halogen-free, silicon-free, isocyanate-free. Can be stored unopened at 0 to 40 °C up to 24 months from date of production. Clear internal dimensions: 77 x 77 x 46 mm























Polypropylene

#### Master data


Item number	2363012
Туре	T 40 KVM
Description 1	Junction box kit
Description 2	with casting compound KVM
Manufacturer	OBO
Dimension	90x90x52
Material	Polypropylene
Smallest sales unit	1
Unit of quantity	Piece
Weight	48.7 kg
Weight unit	kg/100 pc.
CO Footprint (GWP) Cradle-to- Gate	0,4092 kg COe / 1 Piece

### **Technical data sheet**

## **Aquasit cold casting compound with T40 junction box**



**Item number: 2363012** 

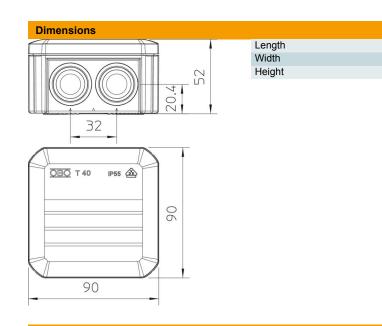

#### Technical data

Expandable	yes		
No. of entries	7		
Type of insertion	Plug-in seal		
Type of entry	Cable		
Type of housing penetration	Cuttable stepped membrane		
Measured insulation voltage Vi	500 V		
Equipment	Terminal		
Cover	Not transparent		
Cover fastening	Locking		
Entry from rear	yes		
Entries	7 x M25		
Explosion-tested version	no		
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C		
Shape	Square		
Maintain electrical functions	Without		
For Ex zone	Without		
For Ex zone gas	Without		
For Ex zone dust	Without		
Fibre-glass reinforced	no		
Halogen-free	yes		
Clear internal dimensions	77 x 77 x 46 mm		
With screening	no		
with lid	yes		
Mounting type	Wall/ceiling mounting		
Nominal cross-section, min.	4 mm²		
Nominal voltage	500 V		
Sealable	no		
Protection rating	IP56		
Protection rating IK code	IK07.		

90 mm 90 mm

52 mm

### **Technical data sheet**

# Aquasit cold casting compound with T40 junction box



**Item number: 2363012** 

Technical data		
Permitted max.	temperature range,	0° °C
Permitted min.	temperature range,	-5 °C
Weatherp	roof	no