

Technical data sheet

SurgeController V20, plug-in arrester 75 V

Item number: 5099579



Surge arrester, type 2

- Plug-in arrester, can be separated from base without tools
- Including thermal and dynamic separating device and visual status display
- High current conductivity and long service life



Master data		
Item number	5099579	
Type	V20-C 0-75	
Description 1	SurgeController V20	
Description 2	plug-in arrester	
Manufacturer	OBO	
Dimension	75V	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	5.16 kg	
Weight unit	kg/100 pc.	
CO Footprint (GWP) Cradle-to-Gate	0,1267 kg COe / 1 Piece	


Technical data sheet

SurgeController V20, plug-in arrester 75 V


Item number: 5099579



Dimensions

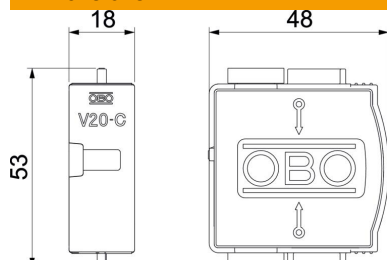

Technical data



Arrester surge current (8/20 µs) [total]	20 kA
Response time	<25 ns
Blow-out	no
Version for	1-pin cover; 75 V
Pole version	1
Structural width in division units (division unit, 17.5 mm)	1
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Remote signalling	no
Maximum continuous voltage AC	75 V
Maximum continuous voltage DC	100 V
Integrated back-up fuse	no
Conductor cross-section, flexible (fine-wire), min.	25 mm ²
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	2.5 mm ²
Lightning protection zone LPZ	1→2
Max. mains-side overcurrent protection	125
Maximum back-up fuse	125 A
Maximum discharge current (8/20 µs)	40 kA
Installation type	On basic element
Nominal discharge current (8/20 µs)	15 kA
Nominal discharge current (8/20 µs) [L-N]	20 kA
Nominal voltage AC (50/60 Hz)	60 V
Network form	TN
Test class, type 2	yes
Protection rating	IP20
Protection level	≤0,5
Signalling on device	Visual
SPD to EN 61643-11	Type 2
SPD to IEC 61643-1	Class II