

# Technical data sheet

## Clamp clip, single, plastic pressure trough, A2

Item number: 1159577



Suitable for all C profile rails with slot width 16–17 mm.  
Stainless steel clip and bolt.  
Polypropylene pressure trough, halogen-free, colour light grey RAL 7035.



**A2** Stainless steel

**2B** Bright, treated

### Master data

|                                    |                        |
|------------------------------------|------------------------|
| Item number                        | 1159577                |
| Type                               | 2056 46 A2             |
| Description 1                      | Clamp clip             |
| Manufacturer                       | OBO                    |
| Dimension                          | 40-46mm                |
| Material                           | Stainless steel 1.4301 |
| Surface                            | Bright, treated        |
| Surface standard                   |                        |
| Smallest sales unit                | 25                     |
| Unit of quantity                   | Piece                  |
| Weight                             | 10.9 kg                |
| Weight unit                        | kg/100 pc.             |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,553 kg COe / 1 Piece |


# Technical data sheet

## Clamp clip, single, plastic pressure trough, A2



Item number: 1159577

### Dimensions

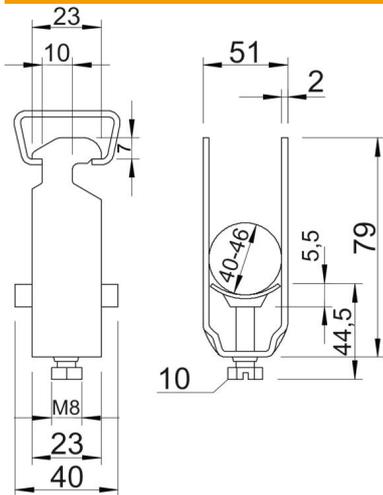

|                  |         |
|------------------|---------|
| Dimension A      | 23 mm   |
| Dimension B      | 51 mm   |
| Dimension C      | 40 mm   |
| Dimension G (mm) | M8      |
| Dimension H      | 79 mm   |
| Dimension L      | 44.5 mm |
| Dimension t      | 2 mm    |
| Dimension x      | 5.5 mm  |

### Technical data

|  |                 |
|--|-----------------|
| Number of cables/pipes                         | 1               |
| for rail with slot width (with interval), max. | 17 mm           |
| for rail with slot width (with interval), min. | 16 mm           |
| Halogen-free                                   | yes             |
| Max. Tightening torque                         | 5 Nm            |
| With plastic trough                            | yes             |
| With metal trough                              | no              |
| Mounting type                                  | Profile rail    |
| Impact-resistant                               | no              |
| Clamping range D, max.                         | 46 mm           |
| Clamping range D, min.                         | 40 mm           |
| Surface addition                               | Untreated       |
| Material addition                              | Rustproof steel |
| With counter-trough                            | no              |
| Material of trough                             | Plastic         |
| Material quality of trough                     | Polypropylene   |