

# Technical data sheet

## Clamp clip, single, A2 metal pressure trough

Item number: 1159712



Suitable for all C profile rails with slot width 16–17 mm.  
Clip, bolt and pressure trough all made of rust-proof stainless steel.



**A2** Stainless steel

**2B** Bright, treated

### Master data

|                                   |                          |
|-----------------------------------|--------------------------|
| Item number                       | 1159712                  |
| Description 1                     | Clamp clip               |
| Description 2                     | with metal pressure sump |
| Manufacturer                      | OBO                      |
| Dimension                         | 8-12mm                   |
| Material                          | Stainless steel          |
| Surface                           | Bright, treated          |
| Surface standard                  |                          |
| Smallest sales unit               | 50                       |
| Unit of quantity                  | Piece                    |
| Weight                            | 3.2 kg                   |
| Weight unit                       | kg/100 pc.               |
| CO Footprint (GWP) Cradle-to-Gate | 0,187 kg COe / 1 Piece   |


# Technical data sheet

## Clamp clip, single, A2 metal pressure trough



Item number: 1159712

### Dimensions

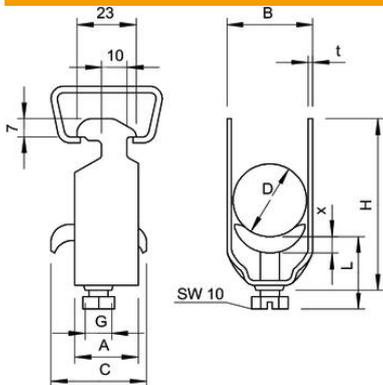

|                  |         |
|------------------|---------|
| Dimension A      | 23 mm   |
| Dimension B      | 16 mm   |
| Dimension C      | 30 mm   |
| Dimension G (mm) | M6      |
| Dimension H      | 44 mm   |
| Dimension L      | 32.5 mm |
| Dimension t      | 1.5 mm  |
| Dimension x      | 3.5 mm  |

### Technical data

|  |                              |
|--|------------------------------|
| Number of cables/pipes                         | 1                            |
| for 1 cable H                                  | 44 mm                        |
| for 1 cable L                                  | 32.5                         |
| for rail with slot width (with interval), max. | 17 mm                        |
| for rail with slot width (with interval), min. | 16 mm                        |
| Halogen-free                                   | no                           |
| Max. Tightening torque                         | 3 Nm                         |
| With plastic trough                            | no                           |
| With metal trough                              | yes                          |
| Mounting type                                  | Profile rail                 |
| Impact-resistant                               | no                           |
| Clamping range D, max.                         | 12 mm                        |
| Clamping range D, min.                         | 8 mm                         |
| Surface addition                               | Untreated                    |
| Material addition                              | Rustproof steel              |
| With counter-trough                            | no                           |
| Material of trough                             | Rustproof steel              |
| Material quality of trough                     | Stainless steel 304 (1.4301) |