

Technical data sheet

Flat cable threaded connection, PG thread rectangular version, stone grey

Item number: 2012855



Flat-cable entry, choke-nipple design with PG connecting thread to DIN 40430, protection rating IP31, with pre-mounted support sealing ring 107/F.



PE Polyethylene

Master data

| | |
|------------------------------------|--------------------------------|
| Item number | 2012855 |
| Type | 106 FL 21 6 30 |
| Description 1 | Flat cable threaded connection |
| Manufacturer | OBO |
| Dimension | PG21 |
| Colour | Stone grey; RAL 7030 |
| Material | Polyethylene |
| Smallest sales unit | 25 |
| Unit of quantity | Piece |
| Weight | 1.905 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0826 kg CO2e / 1 Piece |


Technical data sheet

Flat cable threaded connection, PG thread rectangular version, stone grey

Item number: 2012855



Dimensions

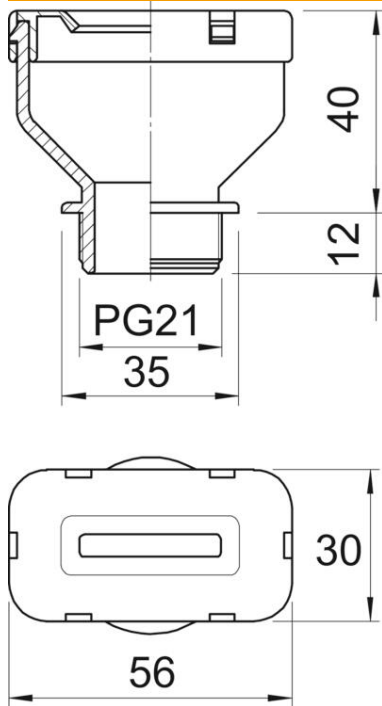

| | |
|--------------|---------|
| Dimension A | 30 mm |
| Dimension B | 56 mm |
| Dimension D | 35 mm |
| Dimension G | PG21 mm |
| Dimension L | 52 mm |
| Dimension L1 | 12 mm |
| Dimension L2 | 40 mm |

Technical data

| | |
|-----------------------------|--------------|
| Type of seal | Sealing ring |
| Version for | Straight |
| Bend protection | no |
| Flat cable/width, max. | 30 mm |
| Flat cable/width, min. | 27 mm |
| Flat cables/thickness, max. | 6 mm |
| Flat cables/thickness, min. | 4 mm |
| Flat cable gland | yes |
| For Ex zone | Without |
| Thread | Pg 21 |
| Thread type | PG |
| Fibre-glass reinforced | no |
| Sealing insert, multiple | no |
| With locknut | no |
| Impact-resistant | no |
| Protection rating | IP31 |
| Strain relief option | no |