


# Technical data sheet

## SOM clip, single

Item number: 2124173

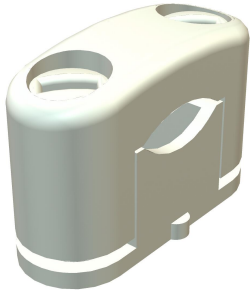

With plastic screws, so corrosion-protected, with slot for fastening with wood screws or 5 mm knock-in anchors.



PS

Polystyrene

### Master data

|                                    |                         |
|------------------------------------|-------------------------|
| Item number                        | 2124173                 |
| Type                               | 3080 LGR                |
| Description 1                      | SOM clip                |
| Manufacturer                       | OBO                     |
| Dimension                          | 6-17mm                  |
| Colour                             | Light grey; RAL 7035    |
| Material                           | Polystyrene             |
| Smallest sales unit                | 50                      |
| Unit of quantity                   | Piece                   |
| Weight                             | 0.926 kg                |
| Weight unit                        | kg/100 pc.              |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0282 kg COe / 1 Piece |


# Technical data sheet

## SOM clip, single

Item number: 2124173



### Dimensions

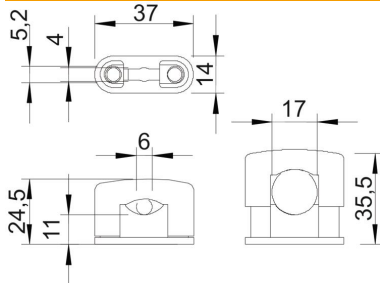

|                  |         |
|------------------|---------|
| Dimension b      | 14 mm   |
| Dimension b1     | 4 mm    |
| Dimension b2     | 5.2 mm  |
| Dimension d max. | 17 mm   |
| Dimension d min. | 6 mm    |
| Dimension H1     | 11 mm   |
| Dimension H2     | 24.5 mm |
| Dimension H3     | 35.5 mm |
| Dimension L      | 37 mm   |

### Technical data

|                                  |            |
|----------------------------------|------------|
| Number of cables/pipes           | 1          |
| Version for                      | Closed     |
| Fastening type                   | Screw hole |
| Suitable in fire protection area | no         |
| Halogen-free                     | yes        |
| Plastic-covered                  | no         |
| Bolt                             | M6 x 18    |
| Clamping range D, max.           | 17 mm      |
| Clamping range D, min.           | 6 mm       |
| UV-resistant                     | no         |