

Technical data sheet




G mesh cable tray Magic® 125 G

Item number: 6005541

Chalfant Item Nb.



G-Shaped mesh cable tray. Available in multiple side-heights and widths. Made from spot-welded steel. Can be mounted directly to walls or ceilings. Magnetic shield insulation 15 dB.

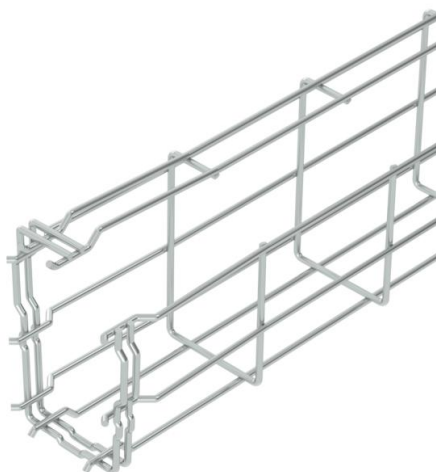

- St** Steel
- G** Electrogalvanized

Master data

Type	G-GRM 125 75 G
Manufacturer	OBO
Colour	zinc
Material	Steel
Surface	Electrogalvanized
Surface standard	EN ISO 19598 / EN ISO 4042
Smallest sales unit	3
Unit of quantity	Metres
Weight	108 kg
Weight unit	lbs/100 pcs.

Dimensions

Length	3,000 mm
Width	75 mm
Width	2.95 in
Height	125 mm
Height	4.92 in
Dimension A	96 mm
Dimension B	75 mm
Dimension C	38 mm
Dimension H	125 mm

Technical data sheet

G mesh cable tray Magic® 125 G



Item number: 6005541

Chalfant Item Nb.

Features/properties/dimensions

Connector version	Integrated connector
Mounting system fastening type	Ceiling Wall
Maintain electrical functions	no
Integrated partition	Without
Usable cross-section	61 cm²
Usable cross-section	6100 mm²
Profile shape	G-shaped
Rustproof steel, pickled	no
Screwless connector	yes
Wide-span version	no
Load test type according to IEC 61537	Type II

Loads

Insertable support spacings, min.	1 m
Insertable support spacings, max.	2.5 m
Support spacing 1.0 m	0.6 kN/m
Support spacing 1.5 m	0.35 kN/m
Support spacing 2.0 m	0.3 kN/m
Support spacing 2.5 m	0.25 kN/m