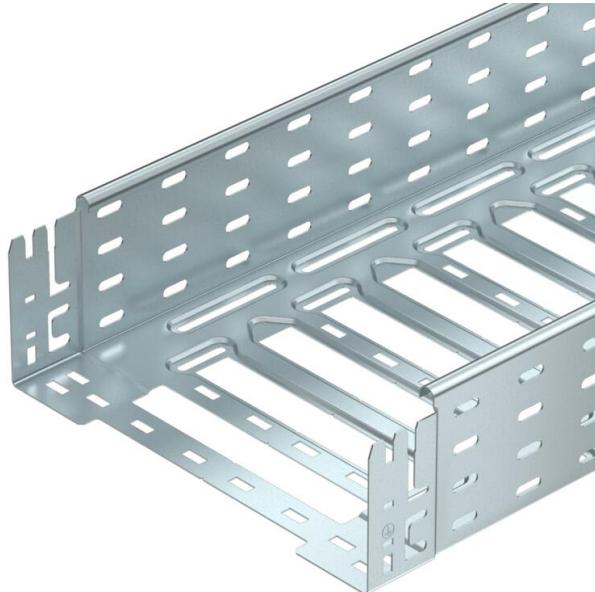


Technical data sheet

Cable tray SKS-Magic® 110 FT

Item number: 6059633

OBO
BETTERMANN



DKEUCA

St Steel

FT Hot-dip galvanised

Master data

Item number	6059633
Type	SKSM 115 FT
Description 1	Cable tray SKSM
Description 2	perforated, quick connector
Manufacturer	OBO
Dimension	110x150x3050
Colour	zinc
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	3
Unit of quantity	Metre
Weight	431.803 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	10,3085 kg CO2e / 1 Meter


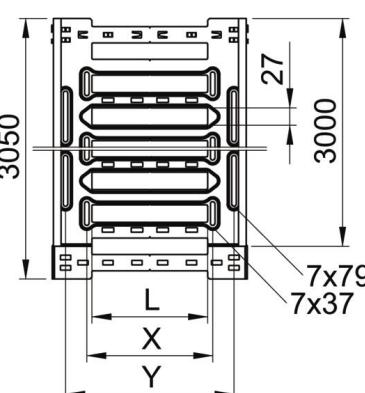
Technical data sheet

Cable tray SKS-Magic® 110 FT

Item number: 6059633

OBO
BETTERMANN

Dimensions

	Length	3,050 mm
	Width	150 mm
	Height	110 mm
	Plate thickness	1.5 mm
	Dimension B	150 mm
	Dimension L	30 mm
	Dimension x	46 mm
	Dimension y	112 mm

Technical data

Connector version	Integrated connector
Mounting system fastening type	Floor Ceiling Wall
Walkable	no
Maintain electrical functions	no
With cover	no
Mounting perforation in base	yes
NATO hole pattern	no
Usable cross-section	161 cm ²
Usable cross-section	16100 mm ²
Rustproof steel, pickled	no
Side perforation	yes
Wide-span version	no
Magnetic shield insulation without cover	20 dB
Magnetic shield insulation with cover	50 dB
Load test type according to IEC 61537	Type II
Type of connector, cable support system	Click fastening

Technical data sheet

Cable tray SKS-Magic® 110 FT

Item number: 6059633

OBO
BETTERMANN

Loads

Insertable support spacings, min.	1.5 m
Insertable support spacings, max.	4 m
Support spacing 1.5 m	3 kN/m
Support spacing 3.0 m	1.7 kN/m
Support spacing 4.0 m	0.8 kN/m

