

# Technical data sheet

XLR connection, 1 module, straight outlet, 3-pin connector,  
as screw connection, black-grey  
Item number: 6105260



Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, 3-pin XLR socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

**PC** Polycarbonate


| Master data                        |                                |
|------------------------------------|--------------------------------|
| Item number                        | 6105260                        |
| Type                               | MTG-X3M S SWGR1                |
| Description 1                      | Multimedia support, XLR, 3-pin |
| Description 2                      | connector w. screw connection  |
| Manufacturer                       | OBO                            |
| Dimension                          | 45x45mm                        |
| Colour                             | Black-grey; RAL 7021           |
| Material                           | Polycarbonate                  |
| Smallest sales unit                | 1                              |
| Unit of quantity                   | Piece                          |
| Weight                             | 3.5 kg                         |
| Weight unit                        | kg/100 pc.                     |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2148 kg CO2e / 1 Piece       |

# Technical data sheet

XLR connection, 1 module, straight outlet, 3-pin connector,  
as screw connection, black-grey  
Item number: 6105260



## Dimensions

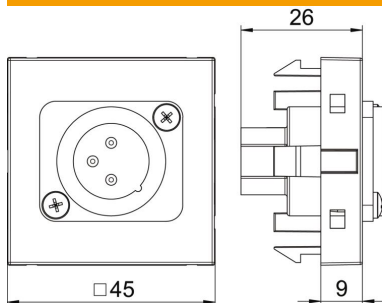

|        |       |
|--------|-------|
| Width  | 45 mm |
| Height | 45 mm |

## Technical data

|                      |                                        |
|----------------------|----------------------------------------|
| Surface version      | Matt                                   |
| Fastening type       | Lock                                   |
| Labelling panel      | Without labelling panel                |
| Halogen-free         | no                                     |
| Hinged cover         | no                                     |
| Lamp-wire connector  | no                                     |
| With printed label   | no                                     |
| With dust protection | no                                     |
| Protection rating    | IP20                                   |
| Depth                | 9 mm                                   |
| Support ring         | yes                                    |
| Transparent          | no                                     |
| Use                  | XLR                                    |
| Strain relief option | no                                     |
| Combination          | Basic element with central cover plate |
| Outlet direction     | Straight                               |