Technical data sheet

Data technology support, 1 module, straight outlet, type C



Item number: 6119216



Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

For installation in Rapid 45 and Rapid 80 device installation trunking, ISS service poles and underfloor systems.

PC

Polycarbonate

Master data


Item number	6119216	
Туре	DTG-2C SWGR1	
Description 1	Data technology support	
Description 2	f. 2 connection modules type C	
Manufacturer	OBO	
Dimension	45x45mm	
Colour	Black-grey; RAL 7021	
Material	Polycarbonate	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	1.1 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to- Gate	0,169 kg CO2e / 1 Piece	

Technical data sheet

Data technology support, 1 module, straight outlet, type C



Item number: 6119216

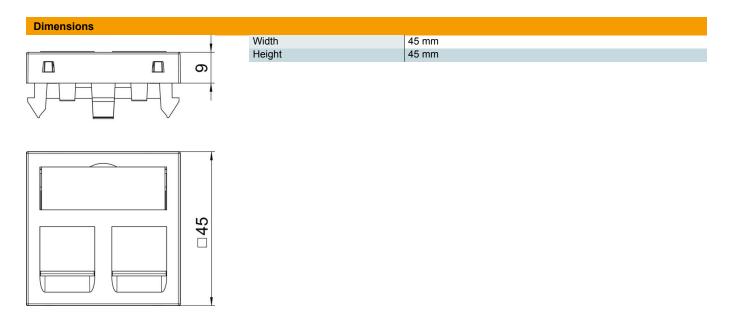

	ica	

Surface version	Matt		
Fastening type	Lock		
Labelling panel	With labelling panel		
Halogen-free	yes		
Hinged cover	no		
Lamp-wire connector	no		
With printed label	no		
With dust protection	yes		
Mounting opening	Type C		
Protection rating	IP20		
Depth	9 mm		
Support ring	no		
Transparent	no		
Use	Installable data connector		
Strain relief option	no		
Combination	nbination Basic element with central cover plate		