Technical data sheet

Vertical bend, three-compartment, height 48 mm

Item number: 7400664



For vertical direction changes of screed-covered underfloor installation ducts (wall connections, supplies).
An important precondition for correct underfloor installation is the screed structure.
In the case of a screed-covered system, it is important that the screed thickness of the duct is at least 35 mm, to avoid the formation of cracks (DIN 18560).
Screed height: 60 mm only for on-floor connection technology (Telitank), 70 mm or more for underfloor connection technology.

St	Steel
FS	Strip galvanised

Master data


Item number	7400664
Type	KV3 35048
Description 1	Vertical bend
Description 2	3 compartments for EÜK
Manufacturer	OBO
Material	Steel
Surface	Strip galvanised
Surface standard	DIN EN 10346
Smallest sales unit	1
Unit of quantity	Piece
Weight	296 kg
Weight unit	kg/100 pc.

Technical data sheet

Vertical bend, three-compartment, height 48 mm

Item number: 7400664

Dimensions

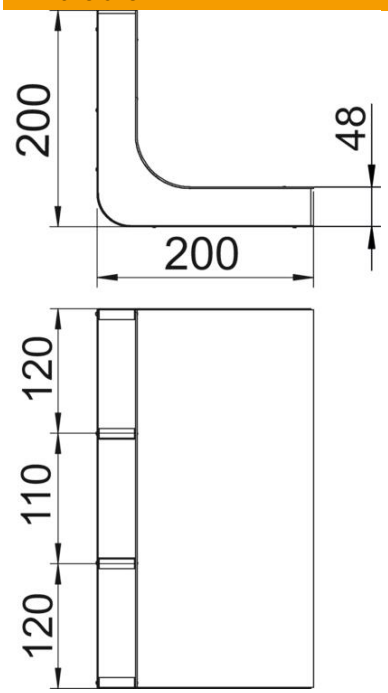

Length	200 mm
Width	350 mm
Height	48 mm
Dimension a	120 mm
Dimension b	110 mm
Dimension h	48 mm

Technical data

Number of fixed partitions	2
Number of compartments	3 St.
Suitable for screed-flush closed underfloor ducts	no
Suitable for screed-covered underfloor ducts	yes
Trunking width, min.	350 mm
Duct height, min.	48 mm
Cross-section, draw a	5428 mm²
Cross-section, draw b	5014 mm²
ROHS-conformant	yes