

Technical data sheet

GESR4 service outlet with handle clamp

Item number: 7405436



Service outlet with handle clamp for up to 6 individual Modul 45 devices in 2 UT3 universal supports, use in duct systems and system floors for indoor use.

Up to 4 installation devices with 50 mm central plate can be inserted.

Service outlet with handle clamp, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.



PA Polyamide

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 7405436 |
| Type | GESR4 U 7011 |
| Description 1 | Service outlet |
| Description 2 | for universal mounting |
| Manufacturer | OBO |
| Dimension | Ø234x61 |
| Colour | Iron grey; RAL 7011 |
| Material | Polyamide |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 140 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,8225 kg CO2e / 1 Piece |


Technical data sheet

GESR4 service outlet with handle clamp

Item number: 7405436



Dimensions

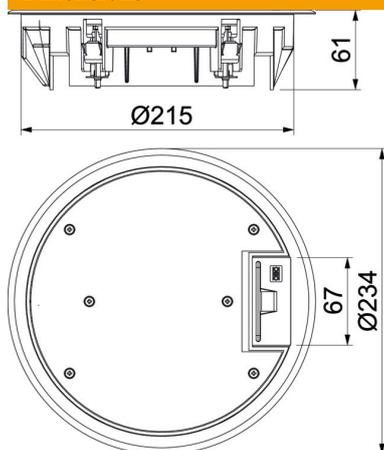

Technical data

| | |
|---|-------------------------|
| Number of installable devices | 6 |
| Number of mounting boxes | 2 |
| Version for | Round |
| Cable outlet version | Swivellable cord outlet |
| Floor covering protection frame | yes |
| Floor care | Dry |
| Seal installation option | no |
| Floor height, min. | 73 mm |
| Suitable for raised floor installation | yes |
| Suitable for screed-flush closed underfloor ducts | yes |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for cavity floor installation | yes |
| Suitable for wet care | no |
| Suitable for underfloor box | 250/350 |
| Suitable for underfloor ducts | yes |
| Device support to accept mounting boxes | yes |
| With floor covering recess | yes |
| Nominal size for device installation units | R4 |
| Frame version | Carpet protection frame |
| Protection rating (IP) when used | IP20 |
| Protection rating (IP) when unused | IP40 |
| Protection rating IK code | IK08 |
| Heavy-duty version | no |
| Clamping range D, max. | 31 mm |
| Clamping range D, min. | 7 mm |
| Installation system type | UT3 |
| Vertical load, large area | to 5,000 N |
| Vertical load, small area | to 3,000 N |

Technical data sheet

GESR4 service outlet with handle clamp

Item number: 7405436



Technical data

| | |
|--------------------------|--------|
| Approvals | VDE |
| Opening mechanism | Handle |
| Floor covering thickness | 5 mm |