

# Technical data sheet

90° socket, China, combination CN-NEMA-EURO,  
single  
Item no. 6120744




Single 90° socket, China, combination China-10A/NEMA-1/Europlug, with increased touch protection, with screw terminals, 2-pin, 10 A, 250 V~.

**PC** Polycarbonate

## Master data

Item no.	6120744
Type	STD-CNOM RW1.5
Description 1	Socket 0°, single
Description 2	China, double/triple
Colour	Pure white
RAL number	9010
Material	Polycarbonate
Material symbol	PC
Smallest sales unit (VG)	1 Piece
Weight	5,80 kg/100 pc.

## Technical data

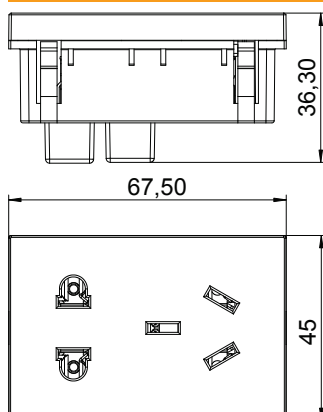

Width	67,50 mm
Height	45,00 mm
Depth	36,30 mm
Cover	Central plate
Closable	<input type="checkbox"/>
Connection type	Screw terminal
Printed label/coding	Without printing
Version	single 0°
Version	Socket 0°, single, China, double/triple
Surface version	Matt
Sockets/switch version	Other
Version for	Other
Number of poles	2
Number of units	1
Number of switchable sockets	0
Ejection mechanism	<input type="checkbox"/>
Fastening type	Lock
Labelling panel	<input type="checkbox"/>
Operating temperature	-5,00 - 40,00 °C
Error current protection	<input type="checkbox"/>
For more difficult conditions (according to VDE)	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Increased touch protection	<input checked="" type="checkbox"/>
Hinged cover	<input type="checkbox"/>

# Technical data sheet

90° socket, China, combination CN-NEMA-EURO,  
single  
Item no. 6120744



## Technical data

Warning light	<input type="checkbox"/>
With on/off switch	<input type="checkbox"/>
With fine-wire fuse	<input type="checkbox"/>
With functional lighting	<input type="checkbox"/>
With orientation lighting	<input type="checkbox"/>
Mounting type	Device installation duct
Nominal voltage	250,00 V
Nominal current	10,00 A
Protection rating	Other
Special power supply	Without special power supply
Socket angle	0°
Transparent	<input type="checkbox"/>
Surge protection	<input type="checkbox"/>
Rotated central insert	<input type="checkbox"/>