

Technical data sheet

Hollow core anchor Easy

Item no. 3498770



Hollow core anchor "Easy" for mounting in prestressed hollow concrete slabs. When the screw or the nut is tightened, the cone is released from the anchor sleeve and pulled into it. This makes the anchor expand in the hollow space, thereby creating firm lock. The hollow core anchor can also be used when the expansion area is not located in the cavity.

The fastening of the component can be done with standard screws and threaded rods.

General type approval Z-21.1-1785 granted by the German Institute for civil engineering (DIBt), Berlin, including permissible loads when exposed to fire up to a fire resistance duration of 120 minutes.


St	Steel
G	Electrogalvanised

Product description

Master data

Item no.	3498770
Type	Easy M8
Description 1	Hollow core anchor Easy
Dimension	M8
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	25 Piece
Weight	1,50 kg/100 pc.

Technical data

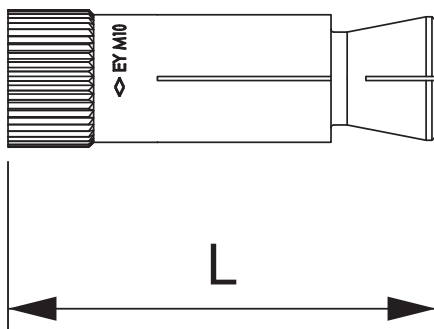

Length	44,00 mm
Dimension L	44,00 mm
Drill hole depth	55,00 mm
Drill hole diameter	12,00 mm
Thread	M8
Thread metric	8
With thread	<input checked="" type="checkbox"/>
With bolts	<input type="checkbox"/>