


# Technical data sheet

## G mesh cable tray Magic® 125

Item no. 6005526

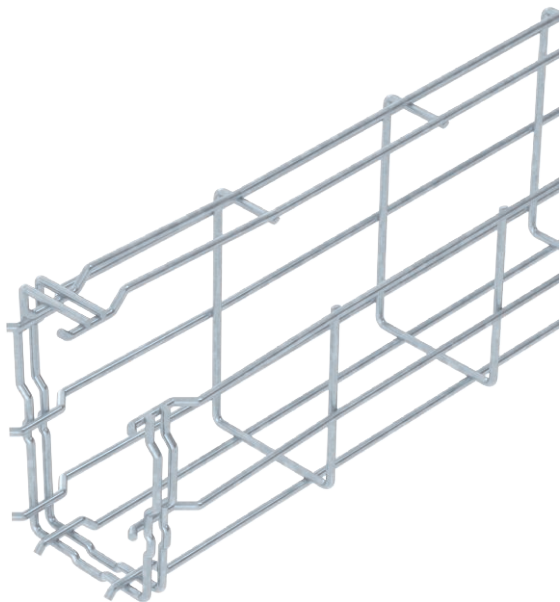

G-shaped mesh cable tray made of spot-welded steel wire with different side heights and widths. Direct wall or ceiling mounting possible. Load capacity details regarding the different mounting methods are available upon request.

Magnetic shield insulation 15 dB.




- St** Steel
- FT** Hot-dip galvanised

### Master data

Item no.	6005526
Type	G-GRM 125 75 FT
Description 1	G mesh cable tray Magic
Dimension	125x75x3000
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	3 m
Weight	113,67 kg/100 m

### Technical data

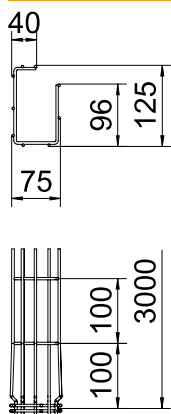

Length	3.000,00 mm
Width	75,00 mm
Height	125,00 mm
Side height	125,00 mm
Dimension A	96,00 mm
Dimension B	75,00 mm
Dimension C	38,00 mm
Dimension H	125,00 mm
Connector version	Integrated connector
Wire diameter	3,90 mm
Suitable for maintaining electrical function	<input type="checkbox"/>
Integrated partition	Without
Usable cross-section	61,00 cm <sup>2</sup>
Usable cross-section	6.100,00 mm <sup>2</sup>
Profile shape	G-shaped
Rustproof steel, pickled	<input type="checkbox"/>
Wide-span version	<input type="checkbox"/>

# Technical data sheet

## G mesh cable tray Magic® 125

Item no. 6005526



### Technical data

#### Appr. load:

Support spacing 1.0 m	0,60 kN/m
Support spacing 1.5 m	0,35 kN/m
Support spacing 2.0 m	0,30 kN/m
Support spacing 2.5 m	0,25 kN/m