


Technical data sheet

G mesh cable tray Magic® 125

Item no. 6005541

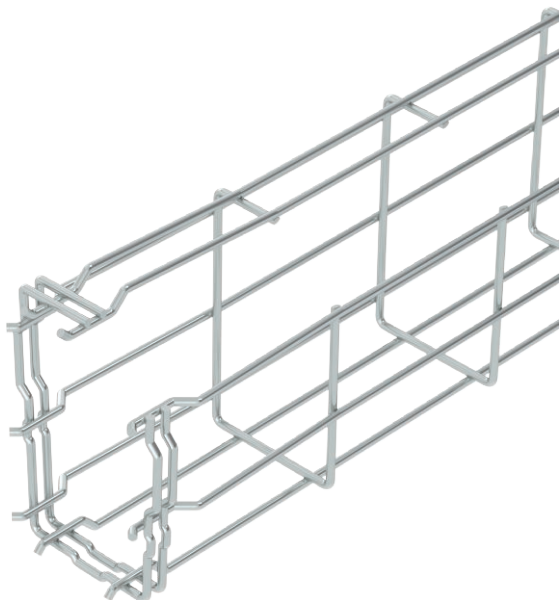

G-shaped mesh cable tray made of spot-welded steel wire with different side heights and widths. Direct wall or ceiling mounting possible. Load capacity details regarding the different mounting methods are available upon request.

Magnetic shield insulation 15 dB.




St	Steel
G	Electrogalvanised

Master data

Item no.	6005541
Type	G-GRM 125 75 G
Description 1	G mesh cable tray Magic
Dimension	125x75x3000
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	3 m
Weight	108,00 kg/100 m

Technical data

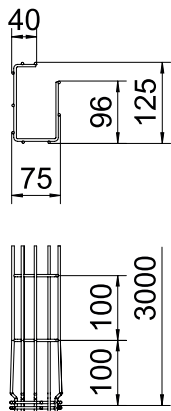

Length	3.000,00 mm
Width	75,00 mm
Height	125,00 mm
Side height	125,00 mm
Dimension A	96,00 mm
Dimension B	75,00 mm
Dimension C	38,00 mm
Dimension H	125,00 mm
Connector version	Integrated connector
Wire diameter	3,90 mm
Suitable for maintaining electrical function	<input type="checkbox"/>
Integrated partition	Without
Usable cross-section	61,00 cm ²
Usable cross-section	6.100,00 mm ²
Profile shape	G-shaped
Rustproof steel, pickled	<input type="checkbox"/>
Wide-span version	<input type="checkbox"/>

Technical data sheet

G mesh cable tray Magic® 125

Item no. 6005541



Technical data

Appr. load:

Support spacing 1.0 m	0,60 kN/m
Support spacing 1.5 m	0,35 kN/m
Support spacing 2.0 m	0,30 kN/m
Support spacing 2.5 m	0,25 kN/m