


# Technical data sheet

## G mesh cable tray Magic® 150

Item no. 6005544

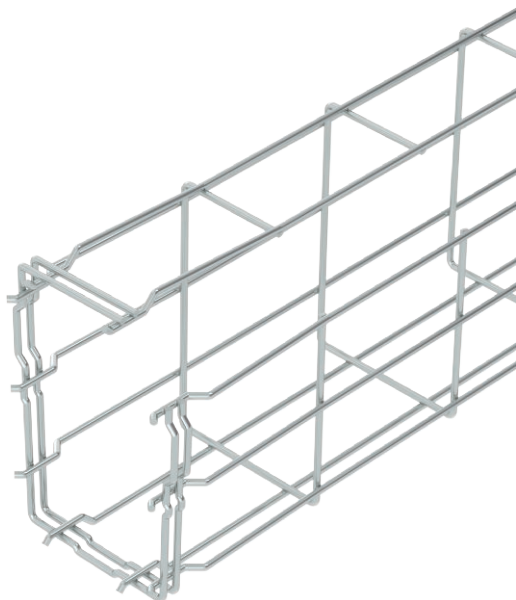

G-shaped mesh cable tray made of spot-welded steel wire with different side heights and widths. Direct wall or ceiling mounting possible. Load capacity details regarding the different mounting methods are available upon request.

Magnetic shield insulation 15 dB.




<b>St</b>	Steel
<b>G</b>	Electrogalvanised

### Master data

Item no.	6005544
Type	G-GRM 150 100 G
Description 1	G mesh cable tray Magic
Dimension	150x100x3000
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	3 m
Weight	127,33 kg/100 m

### Technical data

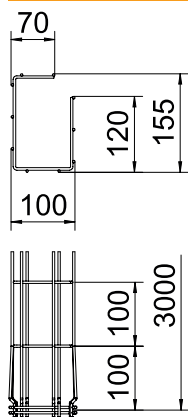

Length	3.000,00 mm
Width	100,00 mm
Height	150,00 mm
Side height	150,00 mm
Dimension A	120,00 mm
Dimension B	100,00 mm
Dimension C	68,00 mm
Dimension H	155,00 mm
Connector version	Integrated connector
Wire diameter	3,90 mm
Suitable for maintaining electrical function	<input checked="" type="checkbox"/>
Integrated partition	Without
Usable cross-section	107,00 cm <sup>2</sup>
Usable cross-section	10.700,00 mm <sup>2</sup>
Profile shape	G-shaped
Rustproof steel, pickled	<input type="checkbox"/>
Wide-span version	<input type="checkbox"/>

# Technical data sheet

## G mesh cable tray Magic® 150

Item no. 6005544



### Technical data

#### Appr. load:

Support spacing 1.0 m	0,60 kN/m
Support spacing 1.5 m	0,50 kN/m
Support spacing 2.0 m	0,35 kN/m
Support spacing 2.5 m	0,30 kN/m