


Technical data sheet

Cable tray SKS-Magic® 60, unperforated

Item no. 6059715

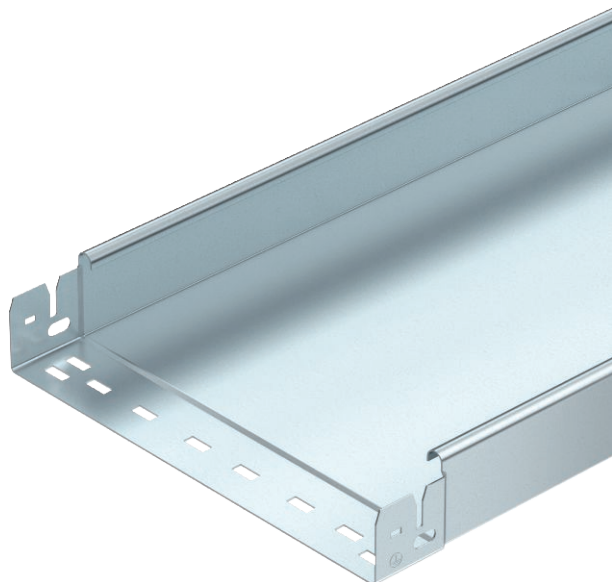

Unperforated cable tray with integrated quick fastening system. The usable length of the cable tray is 3,000 mm.

Continuous equipotential bonding is guaranteed without additional components.



St	Steel
FT	Hot-dip galvanised

Master data

Item no.	6059715
Type	SKSMU 650 FT
Description 1	Cable tray SKSMU
Description 2	unperforated, quick connector
Manufacturer	OBO
Dimension	60x500x3050
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	3 m
Weight	807,93 kg/100 m

Technical data



Usable cross-section	29.800,00 mm ²
Usable cross-section	298,00 cm ²
Suitable for maintaining electrical function	☐
Connector version	Integrated connector
With cover	☐
Mounting perforation in base	☐
NATO hole pattern	☐
Rustproof steel, pickled	☐
Side perforation	☐
Wide-span version	☐

Technical data sheet


Cable tray SKS-Magic® 60, unperforated

Item no. 6059715



Technical data

Dimensions

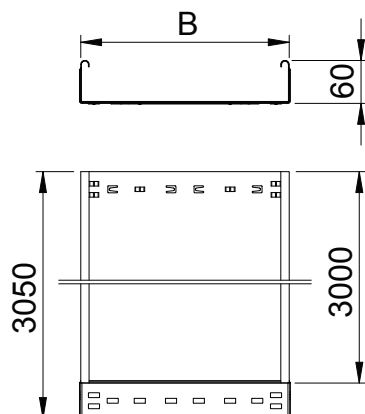


Length	3.050,00 mm
Width	500,00 mm
Height	60,00 mm
Side height	60,00 mm
Dimension B	500,00 mm
Plate thickness	1,50 mm

Appr. load:

Support spacing 1.5 m	2,60 kN/m
Support spacing 2.0 m	1,90 kN/m
Support spacing 2.5 m	1,10 kN/m
Support spacing 3.0 m	0,55 kN/m

Load diagram, cable tray, type SKSMU 60

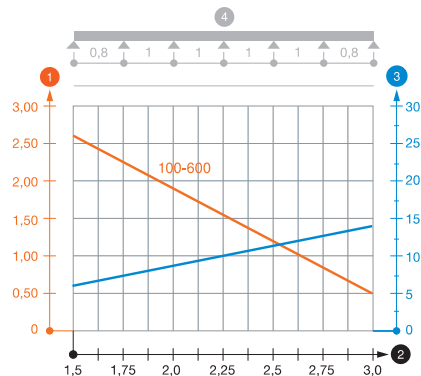

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width