

Technical data sheet

US 3 support

Item no. 6342368



Suspended support (U profile) of dimensions 50 x 30 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.




St Steel

FT Hot-dip galvanised

Master data


Item no.	6342368
Type	US 3 K 100 FT
Description 1	Support
Description 2	with welded head plate
Dimension	50x30x1000
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	1 Piece
Weight	162,00 kg/100 pc.

Technical data

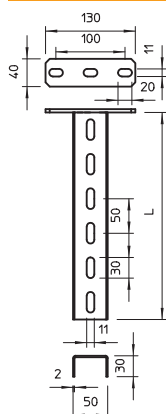

Length	1.000,00 mm
Width	30,00 mm
Height	50,00 mm
Dimension L	1.000,00 mm
Dimension	30 x 50 x 2,5 mm
Version	U profile
Bracket length 200	2,10 kN
Bracket length 400	1,10 kN
EPD article	<input checked="" type="checkbox"/>
Suitable for maintaining electrical function	<input checked="" type="checkbox"/>
Material thickness	2,00 mm
With tothing	<input type="checkbox"/>
Rustproof steel, pickled	<input type="checkbox"/>
Strain relief (dependent on the thickness of the ceiling profile)	5,00 kN

Load charts

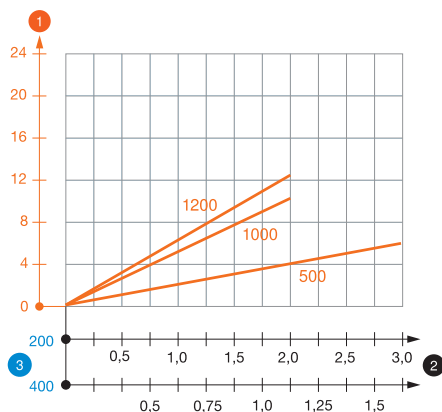

Load diagram, U support, type US 3 K

- 1 Bending of the end of the suspended support at permitted bracket load
- 2 Permitted bracket load in kN without man load
- 3 Bracket length in mm
- Load curves with support lengths in mm

Characteristic anchor load values for US 3 K suspended support

Single-sided load

		Max. load F [kN]			
		Bracket width [mm]			
	Anchor type	110	210	310	410
	BZ-U 8-10-21/75	2,00	1,50	1,15	0,90
	BZ-U 10-10-30/90	3,50	2,70	2,00	1,75

Double-sided load

		Max. load F [kN]			
		Bracket width [mm]			
	Anchor type	110	210	310	410
	BZ-U 8-10-21/75	1,30	3,25	2,80	1,50
	BZ-U 10-10-30/90	6,00	5,80	5,00	4,50

Max. total load $F = \text{cable weight} + \text{cable tray} + \text{bracket} + \text{support}$. The tabular values for double-sided loads take the available axis spacing $a_i = 10 \text{ cm}$ into account. The load capacity values increase considerably when used in uncracked concrete. The values given are based on concrete of strength class C20/25. Observe the installation conditions of the DIBt approval (anchors).

Characteristic anchor load values for US 3 K suspended support

T1	Single-sided load				
T2		Max. load F [kN]			
T3		Bracket width [mm]			
T4	Anchor type	110	210	310	410
	BZ-U 8-10-21/75	2	1,5	1,15	0,9
	BZ-U 10-10-30/90	3,5	2,7	2	1,75