


Technical data sheet

Equipotential busbar BigBar for industrial application

Item no. 5015866

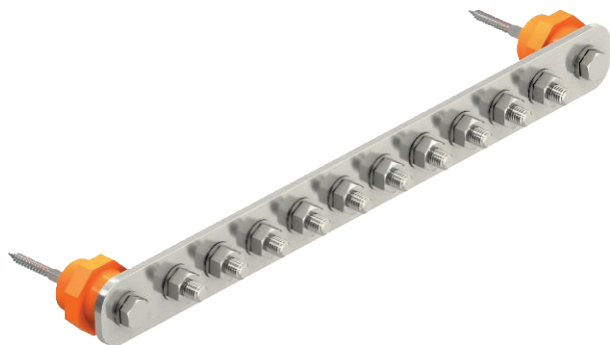

- Main potential equalisation to VDE 0100 Part 410 and Part 540, and also lightning protection potential equalisation to VDE 0185-305 (IEC 62305)
- Insulation feet
- Quick, simple assembly of connection conductors to the contact rail using lock bolts M10
- The high-grade stainless steel versions (V2A) are suitable for outdoor use
- Complete with anchors and bolts for wall mounting
- With lock washer (DIN 137) for bolt locking against loosening (e.g. required in industry and Ex areas)




VA Stainless steel, rustproof 1.4301

Master data

| | |
|--------------------------|--------------------------------------|
| Item no. | 5015866 |
| Type | 1802 10 VA |
| Description 1 | Equipotential busbar |
| Description 2 | BigBar / 10 connections |
| Dimension | 10xM10 |
| Material | Stainless steel, material no. 1.4301 |
| Material symbol | A2 |
| Smallest sales unit (VG) | 1 Piece |
| Weight | 138,21 kg/100 pc. |

Technical data

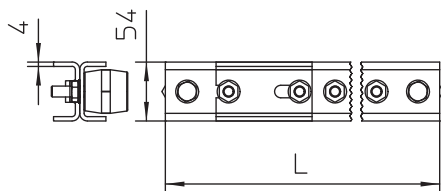

| | |
|--|-------------------------------------|
| Length | 408,50 mm |
| Width | 40,00 mm |
| Height | 5,00 mm |
| Number of connections | 10 |
| Quantity of round conductor connections, total | 10 |
| Quantity of round conductor connections 8 mm | 0 |
| Quantity of round conductor connections 10 mm | 0 |
| Quantity of round conductor connections 8-10 mm | 0 |
| Quantity of flat conductor connections up to 30 mm | 0 |
| Quantity of flat conductor connections up to 40 mm | 0 |
| Quantity of cable connections up to 6 mm ² , rigid | 0 |
| Quantity of cable connections up to 16 mm ² , rigid | 0 |
| Quantity of cable connections up to 25 mm ² , rigid | 0 |
| Quantity of cable connections up to 95 mm ² , rigid | 0 |
| Version | Only terminal |
| Shape | Modular structure |
| Lightning current carrying capacity | H/100 kA |
| Insulator | <input checked="" type="checkbox"/> |
| Short-circuit current (50 HZ)(1 s; ≤300°C) | 7,30 kA |
| Material of the terminal | Stainless steel, rustproof 1.4301 |
| Material of the contact rail | Stainless steel, rustproof 1.4301 |