

# Technical data sheet

## Connection element for installation in the insulated air-termination rod isFang IN

Item no. 5408020



- For the isCon® Premium conductor
- Cable connection and routing in the insulated air-termination rod
- Screw-on termination
- Including heat-shrinkable sleeve and hexagonal wrench
- Tested to up to 200 kA (lightning protection class I)




VA Stainless steel, rustproof 1.4301

### Master data

Item no.	5408020
Type	isCon IN con PRE
Description 1	Connection element
Description 2	for isCon Premium, internal
Dimension	ø 23mm
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Smallest sales unit (VG)	1 Piece
Weight	27,80 kg/100 pc.

### Technical data

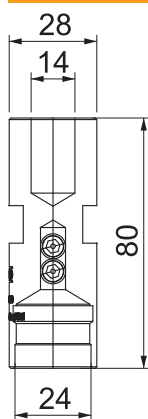

Dimension D	23,00 Ø mm
Lightning current carrying capacity	H2/200 kA
Suitable for connection	Other