

# Technical data sheet

## isFang tripod with side outlet

Item no. 5408902



- Screwless installation of freestanding air-termination rods as well as insulated air-termination rods with 50 mm diameter
- E.g. for internal OBO isCon® conductor
- Roof slope to max. 5 degrees
- Incl. Rd 8–10 crossbar for quick round conductor fastening
- Concrete plinths as well as threaded rods should be ordered separately




**VA** Stainless steel, rustproof 1.4301

### Master data

Item no.	5408902
Type	isFang 3B-250-A
Description 1	Interception rod stand
Description 2	for isCon conductor, internal
Dimension	2,9x2,5m
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Smallest sales unit (VG)	1 Piece
Weight	2.500,00 kg/100 pc.

### Technical data

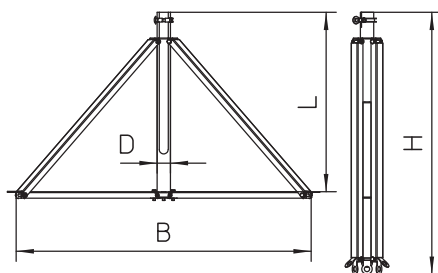

Dimension B	2.900,00 mm
Dimension D	50,00 Ø mm
Dimension H	2.055,00 mm
Dimension L	1.450,00 mm
Version	Stand
Air-termination rod holder	Screwless
Diameter	2.900,00 mm