

# Technical data sheet

isFang, insulated air-termination rod for inner-routed  
isCon conductor with side exit  
Item no. 5408890



- For installation of the OBO isCon® Pro+ conductor in the pipe
- With side conductor outlet matching isFang air-termination rod stand with side outlet, type isFang 3B-A
- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- Inclusive connection element (type isCon IN connect)
- Inclusive potential connection (type IsCon In PAE)




**GFK** Fibreglass-reinforced plastic

## Master data

Item no.	5408890
Type	isFang IN-A10000
Description 1	Insul. interception rod+outlet
Description 2	for isCon conductor, internal
Dimension	10000mm
Material	Fibreglass reinforced plastic
Material symbol	GFK
Smallest sales unit (VG)	1 Piece
Weight	1.540,00 kg/100 pc.

## Technical data

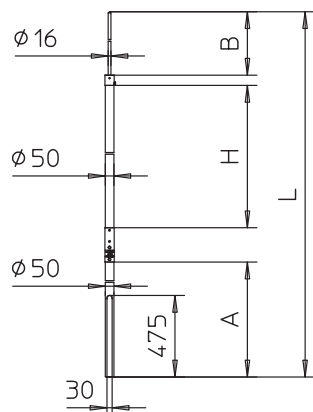

Length	10.000,00 mm
Dimension A	6.000,00 mm
Dimension B	2.000,00 mm
Dimension D	50,00 Ø mm
Dimension H	1.733,00 mm
Connection	Round conductor
Version	Air-termination rod
High voltage-resistant, insulated version	<input checked="" type="checkbox"/>