


Technical data sheet

Surge protection module for Modul 45 with audible signalling

Item no. 6117465

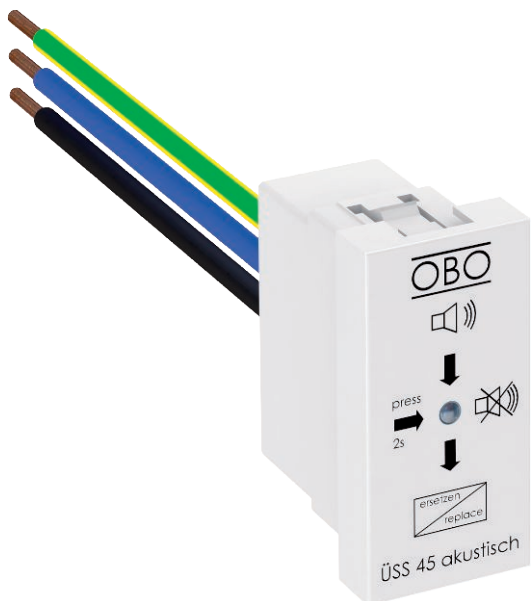

Surge protection / network fine protection, type 3, according to EN 61643-11 for installation in Rapid 45 trunking, device installation trunking and underfloor systems.


- Version-A with acoustic function display (switchable signal tone)
- Quick and easy mounting
- Low construction width of 22.5 mm
- Colour: Pure white; RAL 9010

Application: The surge protection device secures downstream and nearby sockets.

Surge protection device Type 3 (Class D) to VDE 0675 Parts 6-11 (DIN EN 61643-11) for installation in Rapid 45 trunking, device installation trunking and underfloor systems.



Dimensions

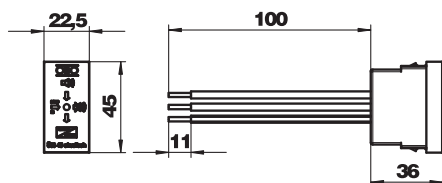

Master data

Item no.	6117465
Type	ÜSS 45-A-RW
Description 1	Surge protective Modul 45
Description 2	with acoustic signal
Dimension	255V
Colour	Pure white
RAL number	9010
Smallest sales unit (VG)	1 Piece
Weight	2,80 kg/100 pc.


Technical data sheet

Surge protection module for Modul 45 with audible signalling

Item no. 6117465



Technical data

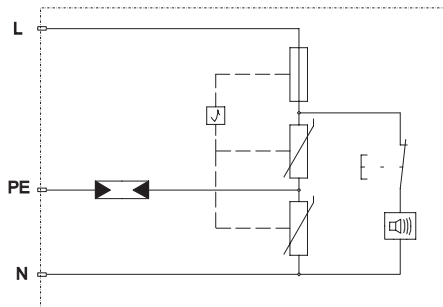

SPD to EN 61643-11	Type 3
SPD to IEC 61643-11	Class III
Test class, type 3	<input checked="" type="checkbox"/>
Nominal voltage	230,00 V
Maximum continuous voltage AC	255,00 V
Max. continuous operating voltage	255,00 V
Nominal discharge current (8/20)	2.5 kA
Rated current	16,00 A
Maximum discharge current (8/20 µs)	5,00 kA
Arrester surge current (8/20) [total]	5,00 kA
Combined voltage protection level [L-PE]	1.500,00 kV
Protection level	1,5 kV
Protection level [L-N]	1.500,00 kV
Protection level (L-N)	< 1,5 kV
Protection level (N-PE)	< 1,5 kV
Response time	25 ns
Maximum back-up fuse	16,00 A
Temperature range	-25+45 °C
Version	Acoustic function display
Installation type	Duct installation
Protection rating	IP20
Protection rating	IP 20
Blow-out	<input type="checkbox"/>
Telecommunications contact	<input type="checkbox"/>
Connection cross-section, rigid	1,50 - 1,50 mm ²
Signalling on device	Acoustic