


Technical data sheet

Quick pipe, light grey

Item no. 2153904

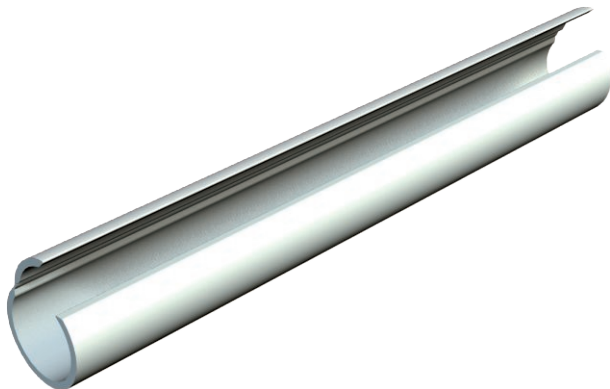

Quick pipe combines the advantages of cable duct and installation pipe in an intelligent system. This system allows tidy and safe surface-mounted installation of all kinds of cables on walls and ceilings. Quick pipe is available in four metric sizes: M16, M20, M25 and M32. The stock length is 2 m.

The system is VDE-tested and achieves a protection rating of IP44. The Quick pipe can be used in the temperature range between -25 and +60 °C and is resistant against impact energy of 5 J. The fittings are a component part of the system. The smallest shipped quantity is one shipping box.




PVC Polyvinylchloride

Master data

Item no.	2153904
Type	2953 M16 LGR
Description 1	Quick pipe
Dimension	M16
Colour	Light grey
RAL number	7035
Material	Polyvinylchloride
Material symbol	PVC
Smallest sales unit (VG)	50 m
Weight	7,00 kg/100 m

Technical data

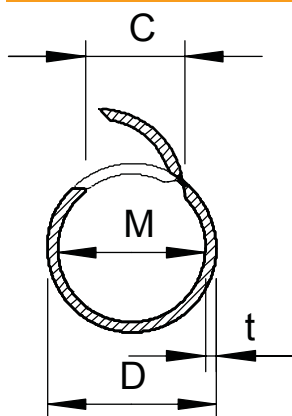

Length	2.000,00 mm
Dimension C	8,2 mm
Dimension D	15,60 mm
Dimension M	13,2
Dimension t	1,20 mm
Surface-mounted	<input checked="" type="checkbox"/>
Flame-resistant version	<input type="checkbox"/>
type	Moulded, self-closing cover
Concrete installation	<input checked="" type="checkbox"/>
Size	M16
Halogen-free	<input type="checkbox"/>
Installation on wood	<input checked="" type="checkbox"/>
Installation under the ground	<input type="checkbox"/>
Installation outdoors	<input type="checkbox"/>
Machines and system installation	<input checked="" type="checkbox"/>
With sleeve	<input type="checkbox"/>
Temperature range	-25+60 °C
Underfloor installation (screed)	<input type="checkbox"/>
Concealed	<input type="checkbox"/>

Classification for electrical pipe standards