


# Technical data sheet

## Quick pipe, light grey

Item no. 2153939

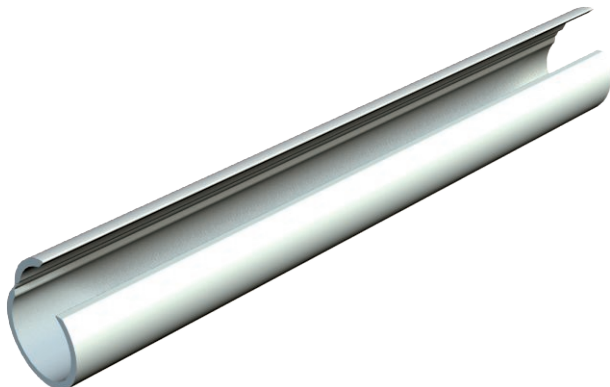

Quick pipe combines the advantages of cable duct and installation pipe in an intelligent system. This system allows tidy and safe surface-mounted installation of all kinds of cables on walls and ceilings. Quick pipe is available in four metric sizes: M16, M20, M25 and M32. The stock length is 2 m.

The system is VDE-tested and achieves a protection rating of IP44. The Quick pipe can be used in the temperature range between -25 and +60 °C and is resistant against impact energy of 5 J. The fittings are a component part of the system. The smallest shipped quantity is one shipping box.




**PVC** Polyvinylchloride

### Master data

Item no.	2153939
Type	2953 M32 LGR
Description 1	Quick pipe
Dimension	M32
Colour	Light grey
RAL number	7035
Material	Polyvinylchloride
Material symbol	PVC
Smallest sales unit (VG)	20 m
Weight	21,50 kg/100 m

### Technical data

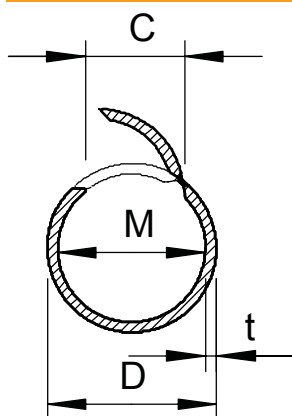

Length	2.000,00 mm
Dimension C	17 mm
Dimension D	32,00 mm
Dimension M	28,6
Dimension t	1,70 mm
Surface-mounted	<input checked="" type="checkbox"/>
Flame-resistant version	<input type="checkbox"/>
type	Moulded, self-closing cover
Concrete installation	<input checked="" type="checkbox"/>
Size	M32
Halogen-free	<input type="checkbox"/>
Installation on wood	<input checked="" type="checkbox"/>
Installation under the ground	<input type="checkbox"/>
Installation outdoors	<input type="checkbox"/>
Machines and system installation	<input checked="" type="checkbox"/>
With sleeve	<input type="checkbox"/>
Temperature range	-25+60 °C
Underfloor installation (screed)	<input type="checkbox"/>
Concealed	<input type="checkbox"/>

### Classification for electrical pipe standards