

Technical data sheet

Anchor rail AML3518, slot width 16.5 mm, perforated

Item no. 1119656



Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.




St	Steel
FT	Hot-dip galvanised

Master data

Item no.	1119656
Type	AML3518P2000FT
Description 1	Profile rail
Description 2	perforated, slot 16.5mm
Dimension	2000x35x18
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	2 m
Weight	89,00 kg/100 m

Technical data

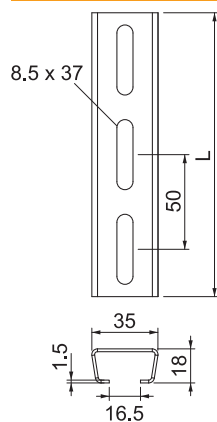

Length	2.000,00 mm
Width	35,00 mm
Height	18,00 mm
Dimension L	2.000,00 mm
Breakable	<input type="checkbox"/>
lampDimension WxH	35 x 18 mm
Version	Single profile
Type of perforation	Perforated back
Drill hole spacing, centre	50,00 mm
Bundle	20,00 m
Suitable for maintaining electrical function	<input checked="" type="checkbox"/>
Material thickness	1,50 mm
With perforation	<input checked="" type="checkbox"/>
With tothing	<input type="checkbox"/>
Profile shape	C profile
Slot width	16,50 mm
Static value A	
Static value ly	
Static value lz	
Static value Wy	
Static value Wz	