


Technical data sheet

Main branch terminal, 5-pole

Item no. 2009038

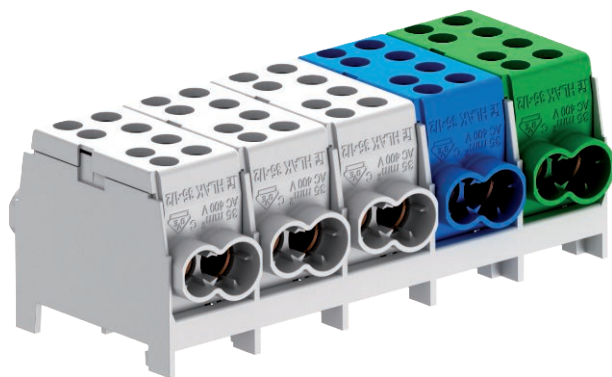



5-pin main terminal block, 2 x 35 mm² + 2 x 25 mm² conductor connection cross-sections per pin. With 2 screws per terminal for secure contact pressure. High-resistance quick-action fastening made of galvanised sheet steel for simple mounting on support rails. Terminal covers are available in the standard conductor colours.



Master data

Item no.	2009038
Type	Hlak 5-10x25
Description 1	Main line branch terminal
Dimension	25/35mm ²
Smallest sales unit (VG)	1 Piece
Weight	38,10 kg/100 pc.

Technical data

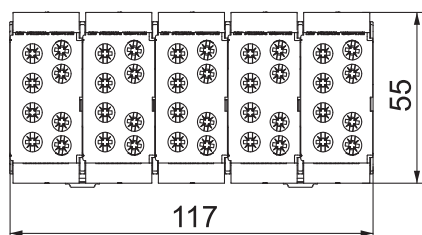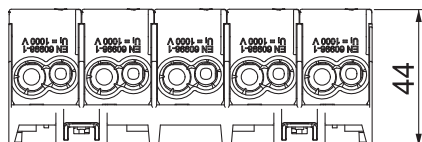

Length	117,00 mm
Width	55,00 mm
Height	37,00 mm
Connectable conductor cross-section, fine-wire with wire-end ferrule	10,00 - 25,00 mm ²
Connectable conductor cross-section, single-wire	10,00 - 35,00 mm ²
Connectable conductor cross-section, multi-wire	11,00 - 35,00 mm ²
Connection position	Top/bottom
Connection cross-section, multi-wire	11,00 - 35,00 mm ²
Connection type	Screw
No. of terminals	20
Number of screwless terminals per pole	4
Measurement current I _L	160,00 A
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 960°C
Suitable for ribbon conductor connection	<input type="checkbox"/>
Suitable for flexible conductors	<input type="checkbox"/>
Suitable for solid conductors	<input checked="" type="checkbox"/>
Suitable for multi-wire conductors	<input checked="" type="checkbox"/>
Suitable for round cable connection	<input checked="" type="checkbox"/>
Suitable for sector conductor connection	<input checked="" type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Insulation material	Thermoplast
Max. measuring operation current I _e	160,00 A
Max. cable cross-section	35,00 mm ²
Max. conductor cross-section	35,00 mm ²
With actuating levers	<input type="checkbox"/>
Nominal cross section	35,00 mm ²

Technical data sheet

Main branch terminal, 5-pole

Item no. 2009038



Technical data

Nominal voltage	960,00 V
Nominal current	160,00 A
Pole number	5
Cross-section	35,00 mm ²
ROHS-conformant	<input checked="" type="checkbox"/>
Impact-resistant	<input checked="" type="checkbox"/>
max. permitted ambient temperature	-25,00 - 70,00 °C
Transparent	<input type="checkbox"/>
Ambient temperature	40 °C
VDE-tested	<input checked="" type="checkbox"/>