

# Technical data sheet

Armoured steel pipe connection sleeve without thread,  
electrogalvanised  
Item no. 2046858



Accessory part: plug-in sleeve for the connections between electrical installation pipes. With burr-free inner wall.




|           |                   |
|-----------|-------------------|
| <b>St</b> | Steel             |
| <b>G</b>  | Electrogalvanised |

## Master data

|                          |                            |
|--------------------------|----------------------------|
| Item no.                 | 2046858                    |
| Type                     | SV40W G                    |
| Description 1            | Conduit plug-in coupler    |
| Description 2            | without thread             |
| Dimension                | Ø40mm                      |
| Material                 | Steel                      |
| Material symbol          | St                         |
| Surface                  | Electrogalvanised          |
| Surface to DIN           | EN ISO 19598 / EN ISO 4042 |
| Surface symbol           | G                          |
| Smallest sales unit (VG) | 25 Piece                   |
| Weight                   | 13,20 kg/100 pc.           |

## Technical data

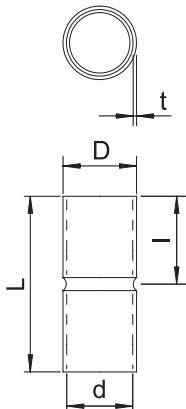

|                                    |                                     |
|------------------------------------|-------------------------------------|
| Length                             | 80,00 mm                            |
| Dimension D                        | 43,80 mm                            |
| Dimension L                        | 80,00 mm                            |
| Dimension M                        | M40                                 |
| Dimension d                        | 43,80 mm                            |
| Dimension t                        | 1,50 mm                             |
| Dimension l                        | 40,00 mm                            |
| Version                            | Connector                           |
| For pipe diameter                  | 40,00 mm                            |
| Size                               | 40                                  |
| Halogen-free                       | <input checked="" type="checkbox"/> |
| Polished surface                   | <input type="checkbox"/>            |
| Brushed surface                    | <input type="checkbox"/>            |
| With inspection opening and lid    | <input type="checkbox"/>            |
| max. permitted ambient temperature | -45,00 - 400,00 °C                  |
| Two-part                           | <input type="checkbox"/>            |