

# Technical data sheet

## Cap nut cable gland, PG thread, nickel-plated

Item no. 2085615



Cable gland of cap-nut design with large sealing area, and strain relief and torsion protection for high sealing demands with Pg connection thread to DIN 40430, polyamide terminal insert, sealing ring of chloroprene/nitrile rubber, with pre-mounted O ring on the connection thread.

Protection rating IP 68 at 5 bar: 1 hr, tested to VDE 0619.

"Normal" connection thread length, according to DIN 46320.

\* Prices according to DEL notation.



CuZn	Brass
N	Nickel-plated

### Master data

Item no.	2085615
Type	V-TEC PG9 MS
Description 1	Cable gland
Dimension	PG9
Material	Brass
Material symbol	CuZn
Surface	Nickel-plated
Surface symbol	N
Smallest sales unit (VG)	50,00 Piece
Weight	1,60 kg/100 pc.


# Technical data sheet

## Cap nut cable gland, PG thread, nickel-plated

Item no. 2085615



### Technical data

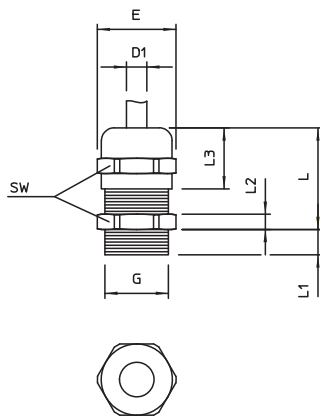

Dimension E	18,90 mm
Dimension L max.	22,00 mm
Dimension L1	6,00 mm
Dimension L2	3,00 mm
Dimension L3	14,00 mm
WAF	17,00 mm
Version	Straight
Type of seal	Sealing ring
Bend protection	<input type="checkbox"/>
Sealing range D	2,50 - 8,00 mm
Sealing range D	0,16 - 0,32 in
explosion-proof	<input type="checkbox"/>
Flat cable threaded connection	<input type="checkbox"/>
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Thread	Pg 9
Thread type	PG
Thread length	6,00 mm
Nominal thread size	9,00
Fibre-glass reinforced	<input type="checkbox"/>
Halogen-free	<input type="checkbox"/>
Multiple sealing insert	<input type="checkbox"/>
With locknut	<input type="checkbox"/>
Impact-resistant	<input type="checkbox"/>
Protection rating	IP68
Splittable gland	<input type="checkbox"/>
max. permitted ambient temperature	-20,00 - 100,00 °C
Strain relief and wringing protection D2	3,50 - 8,00 mm
Strain relief option	<input checked="" type="checkbox"/>