

Technical data sheet

Cap nut cable gland, metric thread, UV-resistant, light grey
Item no. 2022901



The quickest and most convenient way of providing strain relief and tightness with cable glands on junction boxes and housings is with the tried-and-trusted V-TEC VM cable glands from OBO. A protection rating of IP68 is achieved through the integrated sealing lip and the special OBO slat technology. Strain relief and tightness have been tested to DIN EN 62444. The connection threads are metric. Once screwed in place, the installation is there forever, as the optimum thread adjustment with the right pitch ensures permanent resistance to shaking. Applications: From private housing with junction boxes up to industrial applications in the distributor cabinet. Temperature range: -20 °C to +65 °C.




PA Polyamide

Master data

| | |
|--------------------------|------------------|
| Item no. | 2022901 |
| Type | V-TEC VM16UV LGR |
| Description 1 | Cable gland |
| Description 2 | UV-resistant |
| Dimension | M16 |
| Colour | Light grey |
| Material | Polyamide |
| Material symbol | PA |
| Smallest sales unit (VG) | 50 Piece |
| Weight | 0,59 kg/100 pc. |

Technical data

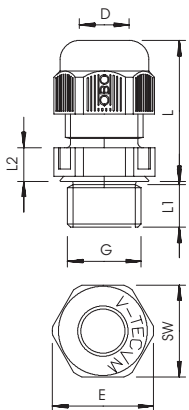

| | |
|--------------------------------|---|
| Dimension E | 22,00 mm |
| Dimension L min. | 21,50 mm |
| Dimension L max. | 23,50 mm |
| Dimension L1 | 8,00 mm |
| Dimension L2 | 5,00 mm |
| WAF | 20,00 mm |
| Version | Straight |
| Type of seal | Sealing ring |
| Bend protection | <input type="checkbox"/> |
| Sealing range D | 4,50 - 10,00 mm |
| explosion-proof | <input type="checkbox"/> |
| Flat cable threaded connection | <input type="checkbox"/> |
| For Ex zone | Without |
| For Ex zone gas | Without |
| For Ex zone dust | Without |
| Flame-resistant | acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C |
| Thread | M16 x 1,5 |
| Thread type | Metric |
| Thread length | 8,00 mm |
| Nominal thread size | 16 |
| Fibre-glass reinforced | <input type="checkbox"/> |
| Halogen-free | <input checked="" type="checkbox"/> |
| Installation torque | 2,00 Nm |

Technical data sheet

Cap nut cable gland, metric thread, UV-resistant, light grey
Item no. 2022901



Technical data

| | |
|------------------------------------|-------------------------------------|
| Multiple sealing insert | <input type="checkbox"/> |
| With locknut | <input type="checkbox"/> |
| Impact-resistant | <input type="checkbox"/> |
| Hexagonal corner dimension | 22,00 mm |
| Protection rating | IP68 |
| Splittable gland | <input type="checkbox"/> |
| max. permitted ambient temperature | -20,00 - 65,00 °C |
| Strain relief option | <input checked="" type="checkbox"/> |