

Technical data sheet

Cap nut cable gland, metric thread with screw plug,
light grey
Item no. 2023044



The quickest and most convenient way of providing strain relief and tightness with cable glands on junction boxes and housings is with the tried-and-trusted V-TEC VM cable glands from OBO. A protection rating of IP68 is achieved through the integrated sealing lip and the special OBO slat technology. Strain relief and tightness have been tested to DIN EN 62444.

The connection threads are metric. Once screwed in place, the installation is there forever, as the optimum thread adjustment with the right pitch ensures permanent resistance to shaking. Applications: From private housing with junction boxes up to industrial applications in the distributor cabinet.

Temperature range: -20 °C to +65 °C.




PA Polyamide

Additional product text, instruction: This makes it easy to close unnecessary openings. No dust or water is able to enter, so the protection rating remains intact. Ideal if all available openings are to be fitted with cable glands right at the time of installation. This considerably reduces the workload during reinstallation.

Master data

Item no.	2023044
Type	V-TEC VM20VS LGR
Description 1	Cable gland
Description 2	pre-assembled seal plug
Dimension	M20
Colour	Light grey
RAL number	7035
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	50 Piece
Weight	0,99 kg/100 pc.

Technical data

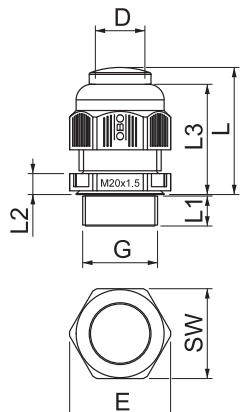

Length	28,00 mm
Width	24,00 mm
Height	27,00 mm
Dimension E	27,00 mm
Dimension L min.	28,00 mm
Dimension L max.	30,50 mm
Dimension L1	9,00 mm
Dimension L2	5,00 mm
Dimension L3	23,50 mm
WAF	24,00 mm
SW 1	24,00 mm
Version	Straight
Type of seal	Sealing ring
Bend protection	<input type="checkbox"/>
Sealing range D	6,00 - 13,00 mm
Sealing range D	0,24 - 0,51 in

Technical data sheet

Cap nut cable gland, metric thread with screw plug,
light grey
Item no. 2023044



Technical data

explosion-proof	<input type="checkbox"/>
Flat cable threaded connection	<input type="checkbox"/>
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C
Thread	M20 x 1,5
Thread type	Metric
Thread length	10,00 mm
Thread increase	1,50 mm
Nominal thread size	20
Fibre-glass reinforced	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Installation torque	3,80 Nm
Multiple sealing insert	<input type="checkbox"/>
With locknut	<input type="checkbox"/>
Impact-resistant	<input type="checkbox"/>
Hexagonal corner dimension	27,00 mm
Protection rating	IP68
Splittable gland	<input type="checkbox"/>
max. permitted ambient temperature	-20,00 - 65,00 °C
Strain relief option	<input checked="" type="checkbox"/>