


Technical data sheet

Electrogalvanised steel pipe, with thread

Item no. 2046864

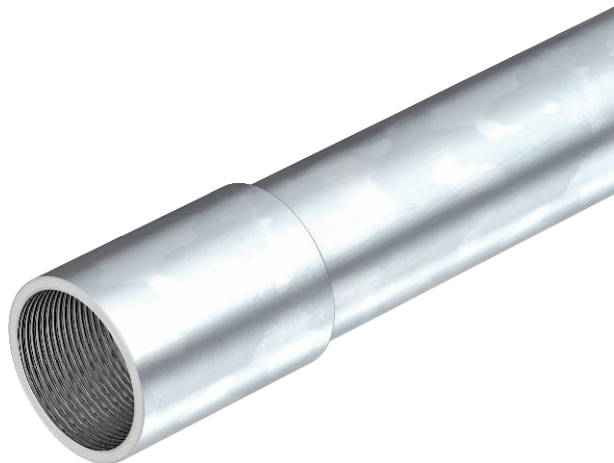

Electrical installation pipe according to EN 61386-1 with threaded ends to EN 60423 for mechanical protection of cables.
With burr-free inner wall. One coupling is already screwed onto each pipe.




St	Steel
G	Electrogalvanised

Master data

Item no.	2046864
Type	SM32W G
Description 1	Threaded conduit
Description 2	with threaded coupler
Dimension	M32x1,5,3000
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	21 m
Weight	120,00 kg/100 m

Technical data

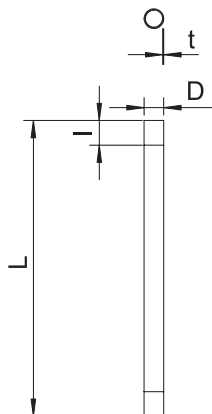

Length	3.000,00 mm
Dimension D	32,00 mm
Dimension L	3.000,00 mm
Dimension M	M32
Dimension t	1,50 mm
Dimension l	18,00 mm
Surface-mounted	<input checked="" type="checkbox"/>
Pipe version	Rigid with thread
Outer-Ø	32,00 mm
Concrete installation	<input checked="" type="checkbox"/>
Pressure resistance class	Very heavy (Class 5)
Thread	M32x1,5
Cavity wall installation	<input checked="" type="checkbox"/>
Installation on wood	<input checked="" type="checkbox"/>
Installation under the ground	<input type="checkbox"/>
Installation outdoors	<input type="checkbox"/>
Machines and system installation	<input type="checkbox"/>
With sleeve	<input checked="" type="checkbox"/>
Polished surface	<input type="checkbox"/>
Brushed surface	<input type="checkbox"/>
max. permitted ambient temperature	-45,00 - 400,00 °C

Technical data sheet

Electrogalvanised steel pipe, with thread

Item no. 2046864



Technical data

Underfloor installation (bitumen, hot asphalt)	<input checked="" type="checkbox"/>
Underfloor installation (screed)	<input checked="" type="checkbox"/>
Concealed	<input checked="" type="checkbox"/>

Classification for electrical pipe standards

Classification code	55571
---------------------	-------