


Technical data sheet

Wiring trunking, type LKV 100100

Item number: 6178341

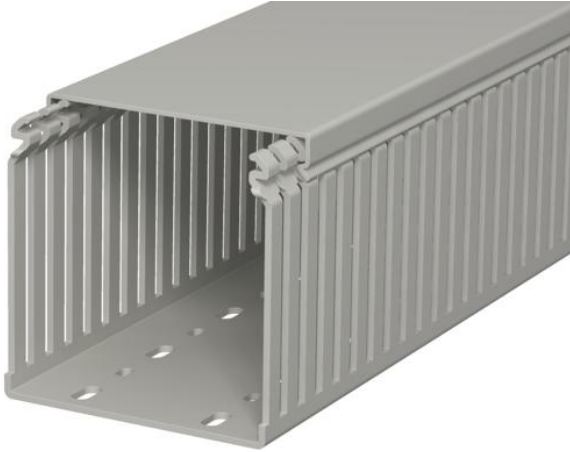

Wiring duct according to DIN EN 50085-2-3, incl. cover and base perforation, for horizontal and vertical routing of electrical cables in the switchgear cabinet. Designed as a DIN duct. Retainers are broken out without tools. The flush-floor routing of cables is possible through predetermined break points. Tested to DIN EN 50085-2-3. Special lengths on request.



PVC Polyvinylchloride

Master data

| | |
|-----------------------------------|-------------------------------|
| Item number | 6178341 |
| Description 1 | Slotted cable trunking system |
| Manufacturer | OBO |
| Dimension | 100x100x2000 |
| Colour | Stone grey; RAL 7030 |
| Material | Polyvinylchloride |
| Smallest sales unit | 8 |
| Unit of quantity | Metre |
| Weight | 116.5 kg |
| Weight unit | kg/100 m |
| CO Footprint (GWP) Cradle-to-Gate | 2,2412 kg COe / 1 Meter |


Technical data sheet

Wiring trunking, type LKV 100100

Item number: 6178341



Dimensions

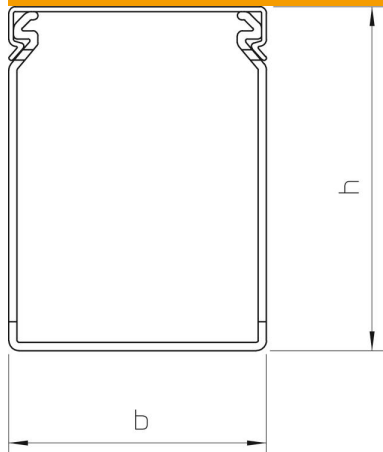

| | |
|--------|----------|
| Length | 2,000 mm |
| Width | 100 mm |
| Height | 100 mm |

Technical data

| | |
|-----------------------------------|-----------------------|
| Side wall version | Slotted |
| Fastening type | Base perforation |
| Flexible | no |
| Halogen-free | no |
| With cover | yes |
| Usable cross-section | 89.36 cm ² |
| Slot spacing | 12.5 mm |
| Slot width | 5 mm |
| Self-extinguishing | yes |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -5 °C |