


Technical data sheet

Cap nut cable gland, PG thread, long, light grey

Item no. 2024365

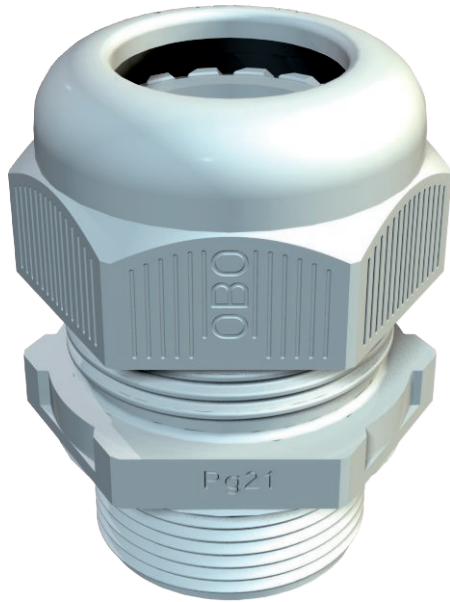

The quickest and most convenient way of providing strain relief and tightness with cable glands on junction boxes and housings is with the tried-and-trusted V-TEC VM cable glands from OBO. A protection rating of IP68 is achieved through the integrated sealing lip and the special OBO slat technology. Strain relief and tightness have been tested to DIN EN 62444.

The connection thread is a PG thread. Once screwed in place, the installation is there forever, as the optimum thread adjustment with the right pitch ensures permanent resistance to shaking.

Applications: From private housing with junction boxes up to industrial applications in the distributor cabinet.

Temperature range: -20 °C to +65 °C.




PA Polyamide

Master data

Item no.	2024365
Type	V-TEC L PG42 LGR
Description 1	Cable gland
Description 2	with long connection thread
Dimension	PG42
Colour	Light grey
RAL number	7035
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	5 Piece
Weight	10,07 kg/100 pc.

Technical data

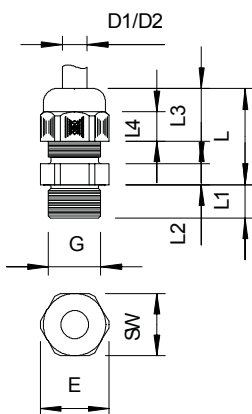

Dimension E	68,00 mm
Dimension L min.	42,00 mm
Dimension L max.	57,00 mm
Dimension L1	18,00 mm
Dimension L2	9,00 mm
Dimension L3	32,50 mm
WAF	60,00 mm
Version	Straight
Type of seal	Sealing ring
Bend protection	<input type="checkbox"/>
Sealing range D	24,00 - 38,00 mm
Sealing range D	1,18 - 1,50 in
explosion-proof	<input type="checkbox"/>
Flat cable threaded connection	<input type="checkbox"/>
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Thread	Pg 42
Thread type	PG
Thread length	18,00 mm
Thread increase	1,50 mm
Nominal thread size	42

Technical data sheet

Cap nut cable gland, PG thread, long, light grey

Item no. 2024365



Technical data

Fibre-glass reinforced	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Installation torque	5,00 Nm
Multiple sealing insert	<input type="checkbox"/>
With locknut	<input type="checkbox"/>
Impact-resistant	<input type="checkbox"/>
Protection rating	IP68
Splittable gland	<input type="checkbox"/>
max. permitted ambient temperature	-20,00 - 65,00 °C
Strain relief and wringing protection D2	26,00 - 38,00 mm
Strain relief option	<input checked="" type="checkbox"/>