

# Technical data sheet

## Cap nut cable gland, EX area, PG thread, long, black

Item no. 2050196



Cable gland with EG design type approval certificate for products and protection systems for use in accordance with the regulations in explosion-hazard area.

Directive 94/9/EC EC design type approval certificate number: PTB 99 ATEX 3112X and ... 3113X.

Robust cap-nut cable gland with large sealing area, as well as strain relief and torsion protection for high sealing demands.

Sealing ring of chloroprene/nitrile rubber, moulded sealing, so no connecting sealing ring needed. Tested to VDE standards Protection IP 68 at 5 bar.



PA Polyamide

### Master data

Item no.	2050196
Type	VTEC EXL PG21 SW
Description 1	Cable gland, EX area
Description 2	with long connection thread
Dimension	PG21
Colour	Black
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	25,00 Piece
Weight	2,33 kg/100 pc.


# Technical data sheet

## Cap nut cable gland, EX area, PG thread, long, black

Item no. 2050196



### Technical data

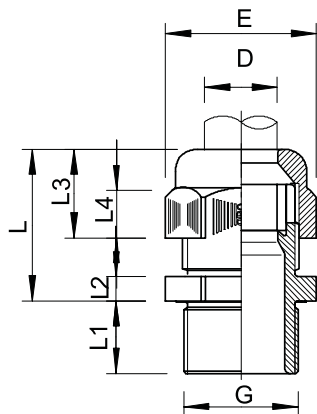

Dimension E	37,50 mm
Dimension L min.	28,00 mm
Dimension L max.	38,00 mm
Dimension L1	15,00 mm
Dimension L2	6,00 mm
Dimension L3	22,00 mm
WAF	33,00 mm
Version	Straight
Type of seal	Sealing ring
Bend protection	<input type="checkbox"/>
Sealing range D	12,00 - 18,00 mm
explosion-proof	<input checked="" type="checkbox"/>
Flat cable threaded connection	<input type="checkbox"/>
For Ex zone gas	1, 2
For Ex zone dust	21, 22
Thread	Pg 21
Thread type	PG
Thread length	15,00 mm
Thread increase	1,50 mm
Nominal thread size	21,00
Fibre-glass reinforced	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Multiple sealing insert	<input type="checkbox"/>
With locknut	<input type="checkbox"/>
Impact-resistant	<input type="checkbox"/>
Hexagonal corner dimension	37,50 mm
Protection rating	IP68
Splittable gland	<input type="checkbox"/>
max. permitted ambient temperature	-20,00 - 65,00 °C
Strain relief option	<input checked="" type="checkbox"/>